

NAVAL POSTGRADUATE SCHOOL

Monterey, California



THESIS

A PROTOTYPE SEMANTIC INTEGRITY FRONT END
EXPERT SYSTEM FOR A RELATIONAL DATABASE

by

George Joseph Salitsky

September, 1991

Thesis Advisor:

Magdi N. Kamel

Approved for public release; distribution is unlimited

REPORT DOCUMENTATION PAGE

1a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED			1b. RESTRICTIVE MARKINGS		
2a. SECURITY CLASSIFICATION AUTHORITY			3. DISTRIBUTION/AVAILABILITY OF REPORT Approved for public release; distribution is unlimited.		
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE					
4. PERFORMING ORGANIZATION REPORT NUMBER(S)			5. MONITORING ORGANIZATION REPORT NUMBER(S)		
6a. NAME OF PERFORMING ORGANIZATION Naval Postgraduate School		6b. OFFICE SYMBOL (If applicable) 37		7a. NAME OF MONITORING ORGANIZATION Naval Postgraduate School	
6c. ADDRESS (City, State, and ZIP Code) Monterey, CA 93943-5000			7b. ADDRESS (City, State, and ZIP Code) Monterey, CA 93943-5000		
8a. NAME OF FUNDING/SPONSORING ORGANIZATION		8b. OFFICE SYMBOL (If applicable)		9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER	
8c. ADDRESS (City, State, and ZIP Code)			10. SOURCE OF FUNDING NUMBERS		
			Program Element No.	Project No.	Task No.
			Work Unit Accession Number		
11. TITLE (Include Security Classification) A PROTOTYPE SEMANTIC INTEGRITY FRONT END EXPERT SYSTEM FOR A RELATIONAL DATABASE					
12. PERSONAL AUTHOR(S) Salitsky, George J.					
13a. TYPE OF REPORT Master's Thesis		13b. TIME COVERED From To		14. DATE OF REPORT (year, month, day) 1991, September, 26	
				15. PAGE COUNT 141	
16. SUPPLEMENTARY NOTATION The views expressed in this thesis are those of the author and do not reflect the official policy or position of the Department of Defense or the U.S. Government.					
17. COSATI CODES			18. SUBJECT TERMS (continue on reverse if necessary and identify by block number)		
FIELD	GROUP	SUBGROUP	Database integrity, Front end expert system, Prototype expert system, Semantic integrity.		
19. ABSTRACT (continue on reverse if necessary and identify by block number) Information is a critical resource in today's enterprises. Whether they are industrial, commercial, educational, or military, these organizations maintain an ever increasing amount of information in databases. Ensuring the accuracy of information in a database is paramount to the organization that maintain these databases. Many decisions are made from the information extracted from the database, and incorrect data will lead to incorrect decision making. This thesis examines the feasibility of using expert systems for enforcing semantic integrity constraints to relational databases. To accomplish this goal, the thesis develops a classification for semantic integrity constraints, applies it to develop rules for the Navy's Naval Aircraft Flight Record application, and builds a front end expert system to enforce these rules dynamically. The expert system enforces integrity rules for all maintenance operations (UPDATE, INSERT, and DELETE.)					
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT <input checked="" type="checkbox"/> UNCLASSIFIED/UNLIMITED <input type="checkbox"/> SAME AS REPORT <input type="checkbox"/> DTIC USERS			21. ABSTRACT SECURITY CLASSIFICATION Unclassified		
22a. NAME OF RESPONSIBLE INDIVIDUAL Magdi N. Kamel			22b. TELEPHONE (Include Area code) (408) 646-2494		22c. OFFICE SYMBOL AS/KA

DD FORM 1473, 84 MAR

83 APR edition may be used until exhausted
All other editions are obsoleteSECURITY CLASSIFICATION OF THIS PAGE
Unclassified

Approved for public release; distribution is unlimited.

A Prototype Semantic Integrity
Front End Expert System
for a Relational Database

by

George J. Salitsky
Lieutenant, United States Navy
B.S., University of Scranton

Submitted in partial fulfillment
of the requirements for the degree of

MASTER OF SCIENCE IN INFORMATION SYSTEMS

from the

NAVAL POSTGRADUATE SCHOOL
September, 1991

ABSTRACT

Information is a critical resource in today's enterprises. Whether they are industrial, commercial, educational, or military, these organizations maintain an ever increasing amount of information in databases. Ensuring the accuracy of information in a database is paramount to the organizations that maintain these databases. Many decisions are made from the information extracted from the database, and incorrect data will lead to incorrect decision making.

This thesis examines the feasibility of using expert systems for enforcing semantic integrity constraints to relational databases. To accomplish this goal, the thesis develops a classification for semantic integrity constraints, applies it to develop rules for the Navy's Naval Aircraft Flight Record application, and builds a front end expert system to enforce these rules dynamically. The expert system enforces integrity rules for all maintenance operations (UPDATE, INSERT, and DELETE.)

51558
C.1

TABLE OF CONTENTS

I. INTRODUCTION	1
A. BACKGROUND	1
B. OBJECTIVES	2
C. RESEARCH QUESTIONS	3
D. SCOPE	4
E. ORGANIZATION OF THE STUDY	5
II. CLASSIFICATION OF INTEGRITY CONSTRAINTS	6
A. Domain Integrity Constraints	7
B. Column Integrity Constraints	8
C. Entity Integrity Constraints	10
D. Referential Integrity Constraints	11
E. User Defined Integrity Constraints	12
III. NAVAL AIRCRAFT FLIGHT RECORD RELATIONAL DATABASE DESIGN	16
A. BACKGROUND	16
B. AIRCRAFT FLIGHT RECORD OBJECTS	20
1. ORGANIZATION Object	21
2. AIRCRAFT Object	21
3. FLIGHT Object	21
4. AIRCREW Object	22
5. AIRCREW FLIGHT Object	22
6. LOGISTICS Object	23

7. DEPARTURE Object	23
8. ARRIVAL Object	23
C. NAVAL AIRCRAFT FLIGHT RECORD SCHEMA	24
1. ORGANIZATION Relation	24
2. AIRCRAFT Relation	24
3. FLIGHT Relation	25
4. AIRCREW Relation	26
5. AIRCREW FLIGHT Relation	26
6. LOGISTICS Relation	27
7. DEPARTURE Relation	28
8. ARRIVAL Relation	28
D. INTEGRITY CONSTRAINTS	29
1. Domain Integrity Constraints	29
2. Column Integrity Constraints	29
3. Entity Integrity Constraints	30
4. Referential Integrity Constraints	30
5. User Defined Integrity Constraints	30
a. Intra-Attribute Constraints	30
b. Intra-Relation Constraints	31
IV. DESIGN AND IMPLEMENTATION OF THE FRONT END EXPERT SYSTEM	33
A. INFERENCE ENGINE	33
B. APPLICATION DESIGN	35
1. Append	36
2. Update	37
3. Delete	38

V. CONCLUSIONS AND RECOMMENDATIONS	40
A. CONCLUSIONS	40
B. RECOMMENDATIONS	41
APPENDIX A: NAVAL AIRCRAFT FLIGHT RECORD OBJECT	
DIAGRAMS	43
APPENDIX B: NAVAL AIRCRAFT FLIGHT RECORD OBJECT	
SPECIFICATIONS	46
APPENDIX C: NAVAL AIRCRAFT FLIGHT RECORD RELATIONAL	
DIAGRAMS	48
APPENDIX D: SESSION WITH NAVAL AIRCRAFT FLIGHT RECORD	
EXPERT SYSTEM	51
APPENDIX E: NAVAL AIRCRAFT FLIGHT RECORD RULE-BASE . .	69
LIST OF REFERENCES	132
BIBLIOGRAPHY	133
INITIAL DISTRIBUTION LIST	134

I. INTRODUCTION

A. BACKGROUND

Semantic integrity is concerned with ensuring that the database is always in a correct state even though some users or application programs may attempt to change it to an incorrect state. Enforcing semantic integrity means shielding the database against invalid UPDATES, INSERTS, and DELETIONS. Traditionally, most integrity checks are performed by application programs or by periodic auditing of the database. Problems of relying on application programs for integrity checks include:

- Application programs that modify the database could corrupt the whole database. That is, integrity checking is likely to be incomplete because the application programmer may not be aware of the semantics of the complete database.
- The criteria for integrity are buried in procedures and are therefore hard to understand and control.
- Code to enforce the same integrity constraints occurs in any number of applications; therefore inconsistencies could be introduced easily.

Problems of these types could be detected through the use of periodic auditing. Periodic auditing, on the other hand, causes problems because of the time lag in detecting errors. These problems include:

- There is considerable difficulty in tracing the source of an error and correcting it.

- The incorrect data may have been used to propagate other errors within the database and ultimately lead to incorrect decisions based on incorrect data.

Thus the prevention of inaccurate data into the database rather than the repair of the database once the damage has occurred is the preferred method. The enforcement of these integrity rules should be the responsibility of the DBMS, but DBMS vendors have failed to provide adequate integrity features to ensure accurate data within the database. [Ref. 1: p.109]

B. OBJECTIVES

This thesis suggests the use of a front-end expert system to enforce semantic integrity features. This expert system would oversee the update, insertion, and deletion operations, monitoring for violations of integrity rules. Once a violation had been identified, the system would take an appropriate action. This appropriate action would mean rejecting the operation and reporting the violation.

To understand how this will be accomplished, consider Figure 1. The expert system has a set of integrity rules that define what errors will be checked. These rules are stored in a knowledge base, which the inference engine of the expert system uses to enforce database integrity. The major advantage of this approach is that the validation of all data is handled by the expert system, instead of being left to the user or the

application program. Another important advantage is that all the integrity rules are located in the expert system's knowledge base. With the knowledge base acting as a central library, each integrity rule is easily queried and can be changed as needed.

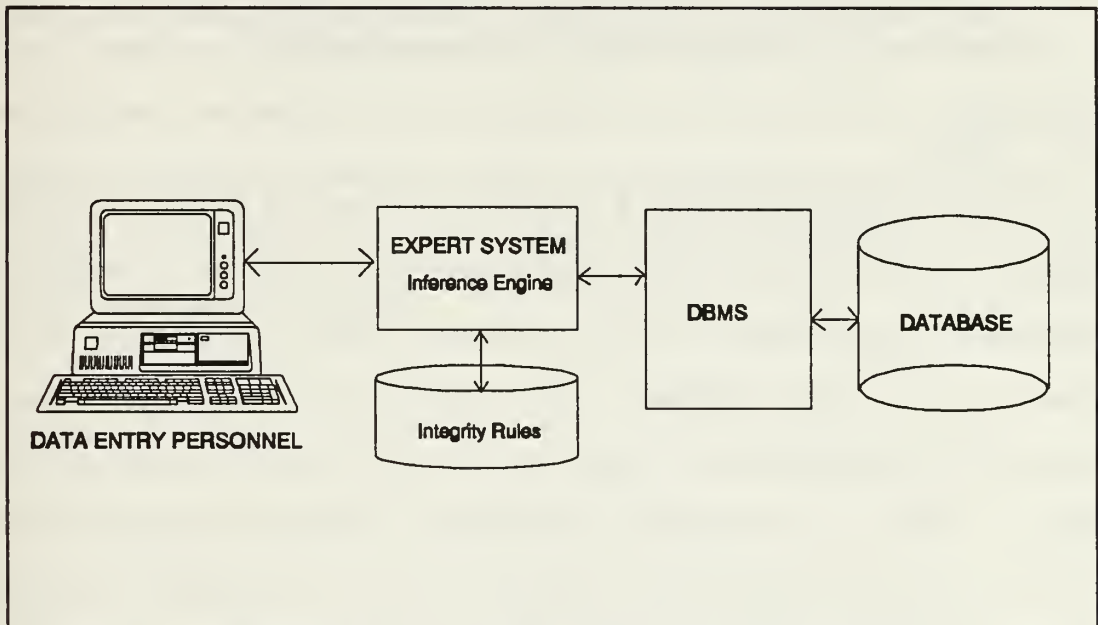


Figure 1.1 Front End Expert System

C. RESEARCH QUESTIONS

The Navy, through the use of the Naval Aircraft Flight Record, collects data for the Individual Flight Activity Reporting System(IFARS). The IFARS is a data bank for information that the Navy uses for safety analysis, budget justification of hours flown, and pilot compliance of established minimum standards. The accurate collection of data enables Naval Aviation to justify its existence while

providing the means to make it inherently less dangerous. The following research questions will be addressed:

- What are the integrity constraints to be enforced by a front end expert system based on the Navy's Naval Aircraft Flight Record, OPNAV 3710/4 and how will these constraints be classified?
- What is the feasibility of using an expert system as a front end in developing and enforcing these integrity constraints in a relational database application such as the Navy's Naval Aircraft Flight Record?

D. SCOPE

This thesis develops a semantic integrity front end expert system that monitors maintenance operations to a relational database developed for the Navy's Naval Aircraft Flight Record. It will address the issue of classification of integrity constraints to provide a structure for the knowledge base. It will also design a relational database representative of the way the user perceives the data on the Naval Aircraft Flight Record. Lastly it will design and implement a prototype front end expert system to enforce the integrity constraints developed, and maintain semantic integrity on the database. This prototype will be limited in its' ability to capture all data required by the Naval Aircraft Flight Record. It was not feasible to include all data or integrity constraints related to the data in the Naval Aircraft Flight Record due to the time constraint on this thesis.

E. ORGANIZATION OF THE STUDY

The thesis is organized as follows. Chapter II provides a classification of the integrity constraints that need to be incorporated into the expert system. Chapter III addresses the design of the relational database for the Naval Aircraft Flight Record application and describes the integrity rules that need to be enforced for this application. Chapter IV describes the design and construction of the front end expert system. Chapter V presents the conclusions of the research, as well as the benefits, limitations, and weaknesses of using a front end expert system.

II. CLASSIFICATION OF INTEGRITY CONSTRAINTS

An important goal of any database system is to model the real world accurately, and in a manner consistent with the user's perception of the data. The relational database model is based on the abstraction that data is stored in two-dimensional tables called relations. Each row in the table represents a tuple and each column represents an attribute. The entire table is equivalent to a file with all the properties of that relation. One of the fundamental principles of the relational database model is that relationships among distinct relations are captured through common values. Certain restrictions must be imposed on these relations to insure the integrity of the data within the database and allow for meaningful comparisons. The following is a list of integrity constraints that must be incorporated into the relational database model to guarantee these meaningful comparisons [Ref. 2].

- Domain Integrity Constraints
- Column Integrity Constraints
- Entity Integrity Constraints
- Referential Integrity Constraints
- User-Defined Integrity Constraints

Each type of constraint is detailed in the following sections.

A. Domain Integrity Constraints

The domain is the fundamental concept of the relational database model. The domain is the set of all possible values an attribute can have. It includes a physical description of:

- the data type
- range of values permitted for all columns within that domain
- allowable comparison operators (e.g., greater than (>) and less than (<))

and a semantic description (the function or purpose of the variable). A pair of values can be meaningfully compared, if and only if these values are drawn from a common domain. Consider the Naval Aircraft Flight Record in Figure 2.1.

DOC#	Document Number
SIDE#	Aircraft Side Number
EXCD	Exception Code
BUNO#	Aircraft Serial Number
ORG	Organization Code
MSN1	Mission Code
HRS1	Mission Hours
TOTFLT	Total Flights
ENG1	Engine 1 Hours
ENG2	Engine 2 Hours
ENG3	Engine 3 Hours
ENG4	Engine 4 Hours

DOC	EXCD	SIDE	BUNO	ORG	MSN1	HRS1	TOTFLT	ENG1	ENG2	ENG3	ENG4
001	C	052	152942	VP5	1A2	10.2	01	6.4	10.2	10.2	8.4

Figure 2.1 Domain Integrity Constraint

If both SIDE# and TOTFLT were declared to be numeric data type, a query to list all aircraft by SIDE#, where TOTFLT is greater than SIDE# would be a valid query. A query of this type would produce as much meaningful information as comparing

apples to oranges. Enforcing domain constraints ensures that two fields being compared not only have the same data types but also are semantically comparable. This feature safeguards users from meaningless information which could result from comparisons of values from different domains. Although special cases do arise that require the comparison of different domains, these should be exceptions and handled as such.

The use of domain constraints results in an integrated relational database[Ref. 2:p.45]. An advantage of this integration is logical value-comparisons. As can be imagined, the domain concept is fundamental to the support of each of the other integrity constraints that are mentioned. Domain constraints are what hold the relational database together and allow it to model the real world accurately and in conjunction with the user's way of thinking.

Today's DBMSs unfortunately do not support the domain concept. What they do support is basic data types(e.g., character, integer, float, calendar date, and clock times) and the ability to define certain ranges on these data types.

B. Column Integrity Constraints

Column integrity constraints are a natural extension of the domain concept. If the relational database supports the domain concept, then it should be capable of declaring in which domain the column belongs(inheriting the physical and semantic constraints associated with that domain), and any

additional constraints that are to apply to the columns. Each column name then becomes a combination of a role name and a domain name, where the role name designates the purpose of the column's use in a specified domain. The advantages are as follows:

- The description of every column that belongs to a given domain need only be declared once in the domain declaration.
- Because a given domain need only be declared once, the valid state of the database is ensured in future updates to integrity constraints.
- Support for ensuring database values are semantically comparable by checking to see if the columns belong to a common domain.
- Column integrity constraints are facilitated.

The last advantage is very important. If the relational database supports the domain concept, it has the ability to detect column integrity violations. Therefore, users can depend on the relational database to determine whether values in two different columns are semantically comparable.

Column integrity constraints may include the following:

- An added range constraint that provides a more confined range than in the domain declaration
- If missing values are allowed within a column
- Whether values must be distinct from each other within the column (primary keys)

Consider once again the Naval Aircraft Flight Record in Figure 2.1. HRS1, ENG1, ENG2, ENG3, and ENG4 belong to the same domain called Hours. The domain data type is a float type with

one decimal place. The range of values allowed is only positive. Negative values are not feasible. The column constraints for both HRS1 and ENG# are more restricted in that the range of values allowed is only between 00.1 to 72.0. Missing values are not allowed within the columns as long as the Exception Code is not X. ENG# value must be equal to or less than HRS1. This condition is specified to allow for engines that are shut down during a flight. Although some of these constraints within the example deal with other classes of integrity constraints, the basic idea of column integrity can be seen.

C. Entity Integrity Constraints

In order to understand Entity Integrity and Referential Integrity, it is important to discuss primary and foreign keys. Each row of a particular table in a relational database contains a column which contains primary-key values that uniquely identify and distinguish that row from every other row in that table. The primary-key can be composite and formed from more than one column. Everywhere else in the database that there is a need to refer to that unique row, the same value from the same domain is used but is referred to as a foreign-key value. The column that the foreign-key value is taken from is called the foreign key.

Entity Integrity implies that no component of a primary key is allowed to have a missing value. The primary-key in the

relational database model is a compulsory feature. An example of this is shown in Figure 2.2. The primary-key Document Number is missing from both records which is a violation of the Entity Integrity rule since it creates unidentified objects within the database. From Figure 2.3 we can see that duplicate primary-key values are prohibited, because of basically the same consequences (loss of identity).

Also, no component of a foreign key is allowed to be missing and inapplicable as opposed to missing and applicable. This case requires additional attention in that Side Number must adhere to referential integrity.

DOC	EXCD	SIDE	BUNO	ORG	MSN1	HRS1	TOTFLT	ENG1	ENG2	ENG3	ENG4
	C	052	152942	VP5	1A2	10.2	01	6.4	10.2	10.2	10.2
	C	052	152942	VP5	1A2	9.3	01	7.0	9.3	9.3	9.3

Figure 2.2 Entity Integrity Constraint(Missing)

DOC	EXCD	SIDE	BUNO	ORG	MSN1	HRS1	TOTFLT	ENG1	ENG2	ENG3	ENG4
001	C	052	152942	VP5	1A2	10.2	01	6.4	10.2	10.2	10.2
001	C	052	152942	VP5	1A2	9.3	01	7.0	9.3	9.3	9.3

Figure 2.3 Entity Integrity Constraint(Duplicate)

D. Referential Integrity Constraints

For each distinct foreign-key value in a relational database, there must exist in the database an equal value of a primary key from the same domain. If the foreign key is composite, those components that are themselves foreign keys must exist in the database as components of at least one

primary-key value drawn from the same domain. Consider the relational diagram in Figure 2.4. Aircraft Side Number is the primary-key value of the AIRCRAFT relation. Aircraft Side Number is also a foreign-key in the FLIGHT relation. From the relational diagram, FLIGHT must have one and only one Aircraft Side Number per document number while the relation AIRCRAFT can have one or more FLIGHTs associated with an Aircraft Side Number.

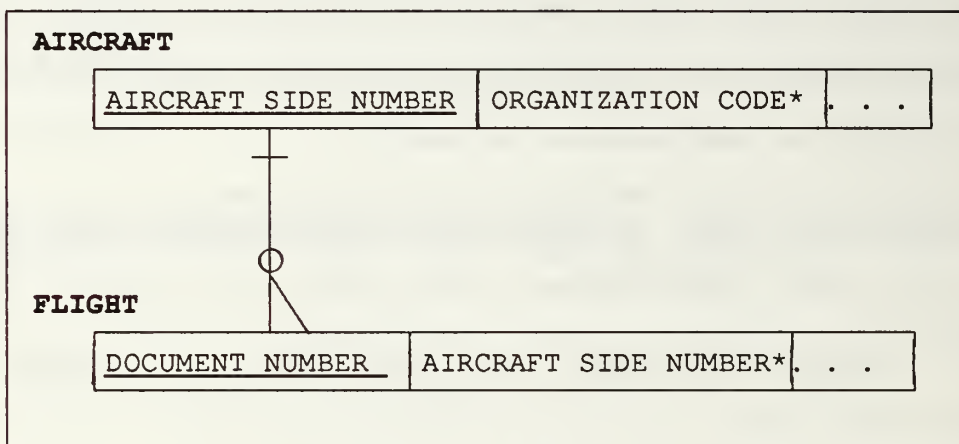


Figure 2.4 Relational Diagram

The entry of Document Number 0003AAA into the Flight relation in Figure 2.5 violates referential integrity because the Side Number 045 is not a primary-key in the Aircraft relation. Referential integrity can be thought of as inclusion dependency in that the foreign key must be a subset of a database in which it is the primary key.

E. User Defined Integrity Constraints

Domain, column, entity, and referential integrity are the building blocks of the relational database. User defined

integrity constraints are constraints that are peculiar to the end-user or company. These constraints allow organization practices and policy, or governmental legislation to be reflected in the database delineated by the user. Consider the Naval Aircraft Flight Record in Figure 2.6. The exception code

AIRCRAFT RELATION	
SIDE#	Aircraft Side Number
ORG	Organization Code
<u>SIDE#</u>	<u>ORG</u>
051	VP5
052	VP5
053	VP5
FLIGHT RELATION	
DOCNUM	Document Number
SIDE#	Aircraft Side Number
<u>DOCNUM</u>	<u>SIDE#</u>
0001AAA	052
0002AAA	051
0003AAA	045

Figure 2.5 Referential Integrity Constraint

DOC	EXCD	SIDE	BUNO	ORG	MSN1	HRS1	TOTFLT	ENG1	ENG2	ENG3	ENG4
001	X	052	152942	VP5	1A2	10.2	01	6.4	10.2	10.2	10.2

Figure 2.6 User Defined Integrity Constraint 1

X is used to document a canceled flight. A canceled flight is one for which no flight time is obtained. Document 001 has violated a user defined integrity rule because it has allowed flight time to be documented for a canceled flight.

User defined constraints such as this, require that UPDATE operations have an ordered sequence of events in order to

comply with all the integrity constraints defined for the database. Examine the Naval Aircraft Flight Record in Figure 2.7. In an UPDATE operation on Document 001 the Exception Code was changed to X. This resulted in the record change in the database demonstrated in Figure 2.8. Not only did all flight time need to be removed, the Mission Code needed to be changed to reflect the user defined constraint that the 2nd position of the Mission Code be N or the character O if the Exception Code is an X.

DOC	EXCD	SIDE	BUNO	ORG	MSN1	HRS1	TOTFLT	ENG1	ENG2	ENG3	ENG4
001	X	052	152942	VP5	1A2	10.2	01	6.4	10.2	10.2	10.2

Figure 2.7 User Defined Integrity Constraint 2

DOC	EXCD	SIDE	BUNO	ORG	MSN1	HRS1	TOTFLT	ENG1	ENG2	ENG3	ENG4
001	X	052	152942	VP5	1N2						

Figure 2.8 User Defined Integrity Constraint 3

The intent of this chapter has been to develop the framework for the expert system. Classifying the integrity constraints allows for the building of rules according to these constraints. In order for the expert system to function properly, the integrity constraints must be transparent to the user so that there is no reliance on voluntary action by the user to maintain integrity within the database. In regard to transparency, attempted violations of the integrity constraints must be denied with an appropriate reason for

denial conveyed to the user. Also, any operations on the database must be atomic in the sense that each operation must be completed satisfactorily (satisfying all integrity constraints) or denied and rolled back to its original state.

III. NAVAL AIRCRAFT FLIGHT RECORD RELATIONAL DATABASE DESIGN

As discussed in Chapter I, the thrust of this thesis is the feasibility of using a front end expert system to enforce semantic integrity constraints. This chapter discusses the development of a relational database model and its associated semantic integrity rules that will serve as the case study for the front end expert system.

A. BACKGROUND

The relational database model developed in this chapter is based on the Naval Aircraft Flight Record(OPNAV 3710/4), shown in Figure 3.1. This record serves as the sole source of all naval aircraft flight data and is applicable in specific areas to aircraft simulators. The OPNAV 3710/4 record is prepared for each attempt at flight of naval aircraft or training evolution for simulators. The types of data collected are:

- A statistical description of the flight pertaining to the aircraft and crew members
- A record of all logistic actions performed during the flight
- A record of weapons proficiency
- A record of training areas utilized and other miscellaneous data

The Operations Department within the aircraft squadron is responsible for verifying the accuracy and completeness of

NO. 1125C05

AIRCRAFT DATA (RECORD TYPE 7B)

NAVAL AIRCRAFT FLIGHT RECORD

PAGE ____ OF ____

18	11	17	21	24	27	30	33	36	39	42	44	46	47	49	79	REC	NO	MO	HOISTS
19	12	22	25	28	31	34	37	40	43	46	49	52	55	58	61	78	3	4	
TOTAL MISSION REQUIREMENT (TMR) DATA															AIRLIFT MISSION NO.				
AIRCRAFT DATA (RECORD TYPE 7C; IF EXC CODE = 0, L OR R; RECORD TYPE = 7D)																			

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540	541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567	568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583	584	585	586	587	588	589	590	591	592	593	594	595	596	597	598	599	600	601	602	603	604	605	606	607	608	609	610	611	612	613	614	615	616	617	618	619	620	621	622	623	624	625	626	627	628	629	630	631	632	633	634	635	636	637	638	639	640	641	642	643	644	645	646	647	648	649	650	651	652	653	654	655	656	657	658	659	660	661	662	663	664	665	666	667	668	669	670	671	672	673	674	675	676	677	678	679	680	681	682	683	684	685	686	687	688	689	690	691	692	693	694	695	696	697	698	699	700	701	702	703	704	705	706	707	708	709	710	711	712	713	714	715	716	717	718	719	720	721	722	723	724	725	726	727	728	729	730	731	732	733	734	735	736	737	738	739	740	741	742	743	744	745	746	747	748	749	750	751	752	753	754	755	756	757	758	759	760	761	762	763	764	765	766	767	768	769	770	771	772	773	774	775	776	777	778	779	780	781	782	783	784	785	786	787	788	789	790	791	792	793	794	795	796	797	798	799	800	801	802	803	804	805	806	807	808	809	810	811	812	813	814	815	816	817	818	819	820	821	822	823	824	825	826	827	828	829	830	831	832	833	834	835	836	837	838	839	840	841	842	843	844	845	846	847	848	849	850	851	852	853	854	855	856	857	858	859	860	861	862	863	864	865	866	867	868	869	870	871	872	873	874	875	876	877	878	879	880	881	882	883	884	885	886	887	888	889	890	891	892	893	894	895	896	897	898	899	900	901	902	903	904	905	906	907	908	909	910	911	912	913	914	915	916	917	918	919	920	921	922	923	924	925	926	927	928	929	930	931	932	933	934	935	936	937	938	939	940	941	942	943	944	945	946	947	948	949	950	951	952	953	954	955	956	957	958	959	960	961	962	963	964	965	966	967	968	969	970	971	972	973	974	975	976	977	978	979	980	981	982	983	984	985	986	987	988	989	990	991	992	993	994	995	996	997	998	999	1000	1001	1002	1003	1004	1005	1006	1007	1008	1009	1010	1011	1012	1013	1014	1015	1016	1017	1018	1019	1020	1021	1022	1023	1024	1025	1026	1027	1028	1029	1030	1031	1032	1033	1034	1035	1036	1037	1038	1039	1040	1041	1042	1043	1044	1045	1046	1047	1048	1049	1050	1051	1052	1053	1054	1055	1056	1057	1058	1059	1060	1061	1062	1063	1064	1065	1066	1067	1068	1069	1070	1071	1072	1073
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------

naval aircraft flight records submitted for data processing as well as verifying the daily audit reports, and coordinating the correction of errors with the maintenance analyst. The Maintenance Analyst is the NAVFLIRS coordinator who is responsible for accomplishing the daily submission of completed naval aircraft flight records for processing, distributing daily audit and monthly reports to the operations and maintenance departments, and coordinating error corrections with operation and maintenance control. Completed naval aircraft flight records are then forwarded to the Naval Safety Center (NAVSAFCEN) for processing. A Monthly Individual Flight Activity Report (MIFAR), shown in Figure 3.2, is produced by the NAVFLIRS system and forwarded to the aviator by NAVSAFCEN. The MIFAR contains all individual activity for that month, excluding those records appearing on the error reports processed by NAVSAFCEN. This includes a summarization by aircraft bureau number and by the flight times (First Pilot Time (FPT), Co-Pilot Time (CPT), and Special Crew Time (SCT)), including instrument (Actual Instrument Time (ACT) and Simulated Instrument Time (SIM)), and night times for that month. The MIFAR also contains a weapons proficiency summary, a miscellaneous data section, and a fiscal year to date summary indicating what is on record in the NAVFLIRS system. In addition to producing the MIFAR, the NAVSAFCEN is the collection and maintenance activity for the IFARS data bank. The IFARS is the primary source of individual flight data,

including those flights flown in authorized simulators. The reporting vehicle for IFARS data is the Naval Aircraft Flight Record OPNAV 3710/4. The IFARS data bank provides valuable exposure data for flight safety analysis and also provides data for other uses such as budget justification, past and future program evaluation, and pilot compliance with established minimum standards. Commander of Naval Military Personnel Command (COMNAVMILPERSCOM) annually convenes a flight board to review pilot flight activity by looking at the IFARS data bank against the annual flying requirements as set forth in OPNAVINST 3710. Each year, the Naval Safety Center mails to reporting individuals their flight data report for the previous fiscal year. IFARS data is applicable to naval aviators, student naval aviators, naval flight officers, aviation pilots flying naval aircraft, naval flight surgeons, and aerospace physiologists/psychologists in a DIFOPS (duty in a flying status for an officer involving operational or training flights) or DIFDEN (duty in a flying status for an officer not involving flying) status on active duty or participating in the Navy or Marine reserve program. [Ref. 3:pp.10(1-4)]

B. AIRCRAFT FLIGHT RECORD OBJECTS

In order to develop a relational schema for the Naval Flight Data application, a series of objects were developed to capture the data requirements for the Naval Aircraft Flight

Record, OPNAV 3710/4. An object is a named collection of properties that sufficiently describes an entity in the user's work environment [Ref. 4:p.90]. The objects developed for this application include: ORGANIZATION, AIRCRAFT, AIRCREW, FLIGHT, AIRCREW-FLIGHT, LOGISTICS, ARRIVAL, DEPARTURE. In the following sections, each object is described in more detail. The complete Object Diagrams are shown in Appendix A.

1. ORGANIZATION Object

This object represents a generic naval aircraft squadron. It is identified by an Organization Code and includes properties such as Data Processing Code, Organization Short Name, Support Code, Departure Time Zone, Departure IACO, Cats/Jato, Airlift Mission, Payload Configuration Data, and Training Codes. Typically an organization will have several aircraft.

2. AIRCRAFT Object

This compound object represents a generic naval aircraft. It can be identified by the Aircraft Side Number or Buno/Serial Number and includes properties such as Type Equipment Code, and Number of Engines. Typically an aircraft is assigned to exactly one organization and is used for many flights.

3. FLIGHT Object

This compound object represents a generic naval aircraft flight. It is identified by the Document Number and

includes properties such as Exception Code, Total Flights, Ship/Field Operations Code, Catapult/Jato Launches, Airlift Mission Number, Number of Hoists, and Remarks. Mission Code, Mission Hours, Engine Number and Engine Hours are multi-valued properties and can contain more than single values. A flight can only involve one aircraft but may typically involve many aircrew members while carrying out many logistic missions.

4. AIRCREW Object

This object represents a generic naval aircrew member. It is identified by the Social Security Number and includes properties such as Last Name, First Initial, Service, Grade, Organization, Natops Qualification Expiration Date, Medical Expiration Date, Instrument Qualification Expiration Date, Water Qualification Expiration Date, Physiology Qualification Expiration Date, Assigned Syllabus, Syllabus Status Code, Aircrew Status Code, and Exception Code. Typically an aircrew member will be involved in many aircrew flights.

5. AIRCREW FLIGHT Object

This association object represents a generic naval aircrew flight. It is identified by the combination of properties, Document Number and Social Security Number. The justification for making AIRCREW FLIGHT an association object instead of a compound object stems from the fact that AIRCREW FLIGHT is perceived as an independent object. Independent, because it contains non-key data and documents a relation

between FLIGHT and AIRCREW. Its properties include First Pilot Time, Co-Pilot Time, Special Crew Time, Actual Instrument Time, Simulated Instrument Time, and Night Time. Multi-valued properties include Type Landings, Number Landings, Type Approach, Number Approaches, Training Code, Training Area, Training Hours, Ordnance Code, Delivery Code, Runs, Score, Miscellaneous Data Code and Miscellaneous Data.

6. LOGISTICS Object

This object represents a generic naval logistic flight leg. It is a composite object that is identified by the composite key of Document Number and Leg Number and contains the property Time Zone. Each logistic leg will be associated with a flight and have one arrival and departure.

7. DEPARTURE Object

This composite object represents a generic naval flight departure leg. It is identified by Document Number, Leg Number, and Departure Time. Its properties include Departure Date, Departure ICAO, Confirmed Payload Cargo, Opportune Payload Cargo, Maximum Passenger, and Maximum Cargo. Delay Departure Code, Delay Departure Hours, Passenger Priority, and Opportune Payload Code are multi-valued properties. Each departure will be associated with one logistic leg.

8. ARRIVAL Object

This composite object represents a generic naval flight arrival leg. It is identified by Document Number, Leg

Number, and Arrival Time. Its properties include Arrival Date, Arrival ICAO, System Status, and Distance. Delay Arrival Code and Delay Arrival Hours are multi-valued properties. Each arrival will be associated with one logistic leg.

C. NAVAL AIRCRAFT FLIGHT RECORD SCHEMA

In this section we perform a logical database design by transforming the objects developed in the previous section into a relational schema. The output from this phase is a set of relations, relation definitions, relationships between relations, and constraints on these relationships. In the following sections, we discuss the main relations and relationships of the schema. Refer to the Object Diagrams in Appendix A and the Relational Diagrams in Appendix C for the following discussion.

1. ORGANIZATION Relation

This relation is transformed from the object ORGANIZATION. It is identified by the attribute organization code. This relation is associated in a one to many optional relationship with the AIRCRAFT relation. In other words, a record of this relation may be associated with one or more records of the AIRCRAFT relation.

2. AIRCRAFT Relation

This relation is transformed from the compound object AIRCRAFT. It is identified by the attribute aircraft side number. It contains the foreign attribute of organization code

from the ORGANIZATION relation. Whereas the ORGANIZATION did not need any instances of aircraft, the AIRCRAFT has a mandatory relationship with the ORGANIZATION. This represents a many to one mandatory relationship. On the other hand, the AIRCRAFT relation is associated in a one to many optional relation with the FLIGHT relation. As with the ORGANIZATION relation, a record in this relation may be associated with one or more records of the FLIGHT relation.

3. FLIGHT Relation

This relation is transformed from the compound object FLIGHT. It is identified by the attribute document side number. It contains the foreign attribute aircraft side number from the AIRCRAFT relation. FLIGHT is represented by a many to one mandatory relationship with AIRCRAFT, indicating that any records from this relation must be associated with one record of the parent AIRCRAFT. The object FLIGHT is also a composite object meaning that it contains repeating groups of non object properties. Each of these groups is represented by a relation in the database. The first relation, MISSION, is identified by the composite key document number and mission code. It is represented as a many to one mandatory relationship indicating the possibility of many mission records, each associated with a FLIGHT record. The second relation, ENGINE, is identified by document number and engine number. It is also represented as a many to one mandatory relationship, indicating as many

records as the aircraft has engines.

The relation FLIGHT also serves as the parent to both the relations AIRCREW FLIGHT and LOGISTICS. In both instances, the relation is associated in a one to many optional relationship. Each record of FLIGHT may be associated with one or more records of both the AIRCREW FLIGHT and LOGISTICS relations.

4. AIRCREW Relation

This relation is transformed from the object AIRCREW. It is identified by the attribute ssn (Social Security Number). This relation is associated in a one to many optional relationship with the AIRCREW FLIGHT relation. In other words, a record of this relation may be associated with one or more records of the AIRCREW FLIGHT relation.

5. AIRCREW FLIGHT Relation

This relation is transformed from the association object AIRCREW FLIGHT representing the relationship between FLIGHT and AIRCREW. The relation is identified by the composite properties of document number and ssn, each of which are the keys of the parent relations. Although this object does not contain a key of its own, it does contain non-key data that indicate details of a specific flight and represents a real object in the user's environment. The non-key data are represented by multiple repeating groups. Each of these repeating groups is represented by a relation with a one to

many optional relationship with AIRCREW FLIGHT. The first relation, LANDING, is identified by document number, ssn, and type landing. The second relation, APPROACH, is identified by document number, ssn, and type approach. The third relation, TRAINING, is identified by document number, ssn, and training code. The fourth relation, TRAINING AREA, is identified by document number, ssn, and training area. The fifth relation, WEAPONS, is identified by document number, ssn, and delivery number. The final relation within the association object is MISCELLANEOUS, identified by document number, ssn, and miscellaneous data code.

6. LOGISTICS Relation

This relation is transformed from the composite object LOGISTICS. It is identified by the composite properties document number and leg number. It is associated with FLIGHT in a many to one mandatory relationship indicating that any records in this relation must be associated with a record in the FLIGHT relation. The relation is also associated with the relations DEPARTURE and ARRIVAL as a one to one mandatory relation. Both relations DEPARTURE and ARRIVAL contain records that describe different aspects of the same relation LOGISTIC. Although these relations may be combined into one, a better user understanding of the relational database design and better database performance can be achieved by the separating the two.

7. DEPARTURE Relation

This relation is transformed from the composite object DEPARTURE. It is identified by the composite properties document number, leg number, and departure time. As was mentioned previously, it is represented as a one to one mandatory relationship with the LOGISTIC relation. It also contains multiple repeating groups represented by the following relations which maintain a one to many optional relationships with DEPARTURE. The first relation, PASSENGER, is identified by document number, leg number, and passenger priority. The second relation, PAYLOAD, is identified by document number, leg number, and opportune payload code. The last relation, DEPARTURE DELAY, is identified by document number, leg number, and delay departure code.

8. ARRIVAL Relation

This relation is transformed from the composite object ARRIVAL. It is identified by the composite properties document number, leg number, and arrival time. Once again, it is represented as a one to one mandatory relationship with the LOGISTIC relation. It is also represented by a relation, ARRIVAL DELAY, representing a one to many optional relationship. The relation is identified by document number, leg number, and delay arrival code.

D. INTEGRITY CONSTRAINTS

In this section, we present the semantic integrity rules that need to be maintained for the relational schema developed in the previous section [Ref. 5]. Due to the sheer size of the database design, it was decided to narrow the focus of the front end expert system by limiting the integrity constraints to the FLIGHT relation. The narrowed focus still allowed the system to address all the classes of integrity constraints developed in Chapter II.

1. Domain Integrity Constraints

The domain constraints enforced in this application are presented in Appendix B.

2. Column Integrity Constraints

The column constraints as discussed previously in Chapter II can be thought of as a subset of the domain integrity constraints. The following column integrity constraints are enforced in the front end expert system:

- Exception Code must be C, D, X, or BLANK
- Mission Code (n) where $n = 1$ must be in the range of 1-6 or BLANK
- Mission Code (n) where $n > 1$ must be in the range of 1-5 or BLANK
- Mission Hours (n) where $n = 1$ must be in the range of 0.1 to 72.0 or BLANK
- Mission Hours (n) where $n > 1$ must be in the range of 0.1 to $(72.0 - \text{Sum of Mission Hours})$ or BLANK
- Total Flight must be in the range of 1-99 or BLANK

- Ship/Field Operations must be A, B, 1, 2, or BLANK
- Catapult/Jato Launches must be in the range of 1-99 or BLANK
- Engine Hours (n, n+1, n+2,...) must be in the range of 0.1 to 72.0 or BLANK
- Number of Hoists must be in the range of 1-99 or BLANK

3. Entity Integrity Constraints

The following entity integrity constraints are enforced by the front end expert system:

- Document Number cannot be missing or duplicated
- Aircraft Side Number cannot be missing
- Mission Code (n) where n = 1 cannot be missing

4. Referential Integrity Constraints

The following referential integrity constraints are enforced by the front end expert system:

- Aircraft Side Number must be validated against the AIRCRAFT object for the purpose of recording a valid Buno/Serial number and ensuring the correct number of engines are recorded for flight time
- Document Number for the composite objects is the same as the FLIGHT document number

5. User Defined Integrity Constraints

The following user defined integrity constraints are enforced by the front end expert system.

a. Intra-Attribute Constraints

These user defined integrity constraints apply to the relationships within an attribute:

- Mission Code (n), Position 2, when n=1 or >1, must be R or in the range of A-I or N-P if Position 1 is a 1

- Mission Code (n), Position 2, when n=1 or >1, must be in the range of J-R if Position 1 is a 2
- Mission Code (n), Position 2, when n=1 must be 0 or in the range of S-Z if Position 1 is 3-6 or Position Code is 3-5 when n>1
- Mission Code (n), Position 2, when n=1 must be 0 or N if Exception Code is X
- Mission Code (n), Position 1,2, and 3 when n>1 must be BLANK when Exception Code is X
- Mission Code (n), Position 1,2, and 3 when n>2 must be BLANK when Mission Code (n-1) is BLANK

b. Intra-Relation Constraints

These user defined integrity constraints apply to the relationships within a relation:

- Mission Hours (n), when n=1 or >1, must be Blank if Exception Code is X
- The sum of Mission Hours (n+(n+1)+(n+2)+...) must not exceed 72.0 hours
- Mission Hours (n), when n>1, must be BLANK if Mission Code (n) is BLANK
- Total Flight must be BLANK if Exception Code is X
- Total Flight must meet its column integrity constraints if the Exception Code is not X
- Ship/Field Operations Code must be BLANK if Exception Code is X
- Ship/Field Operations Code must meet its column integrity constraints if the Exception Code is not X
- Catapult/Jato Launches must be BLANK if Exception Code is X
- Catapult/Jato Launches must meet its column integrity constraints if the Exception Code is not X
- Airlift Mission Number must be BLANK if Exception Code is X

- Airlift Mission Number must meet its column integrity constraints if the Exception Code is not X
- Engine Hours (n,n+1,n+2,...) must be BLANK if Exception Code is X
- Engine Hours (n,n+1,n+2,...) must be in the range of 0.1 to Mission Hours (n,n+1,n+2,...) if the Exception Code is not X
- Number of Hoists must be BLANK if Exception Code is X
- Number of Hoists must meet its column integrity constraints if the Exception Code is not X

In the next chapter, the design and implementation of a front end expert system that enforces the above integrity rules is described.

IV. DESIGN AND IMPLEMENTATION OF THE FRONT END EXPERT SYSTEM

Expert systems are programs that respond to information very much like a human expert in a well-defined area (the program's domain). They capture and distribute knowledge to the non-experts and general practitioners in specific application areas where:

- Difference in performance is largely based on expert knowledge.
- This knowledge is experienced-based.
- The knowledge can be stated as "If...then" rules [Ref. 6:p.17]

An important aspect of some expert systems is the ability to capture knowledge and then record it as a set of rules in a knowledge base. Expert system shells such as VP-Expert use an inference engine that interacts with the user and navigates through the knowledge base to deliver this knowledge.

A. INFERENCE ENGINE

The search strategy or problem solving method used in this thesis application and supported by VP-Expert is called "backward-chaining." The inference engine starts by identifying a target variable and then moves through a sequence of rules until it finds a value that can be assigned to that target variable. Consider the following example in

Figure 4.1.

In this example, any of the three rules can assign a value to TOTFLT_VALID. If the value for EXCD is not known then the inference engine looks for the rule assigning a value to EXCD

FIND TOTFLT_VALID;	-The target variable is identified as TOTAL_FLIGHT_VALID
RULE USER_DEFINED_CONSTRAINT_TOTFLT_1	
IF	
EXCD = X	-If Exception Code is equal to the value "X"
THEN	
TOTFLT = (BLANK) TOTFLT_VALID = TRUE;	-Then assign a null value to TOTFLT and assign TRUE to TOTAL_VALID
RULE USER_DEFINED_CONSTRAINT_TOTFLT_2	
IF	
EXCD <> X AND TOTFLT >= 1 AND TOTFLT <= 99	-If Exception Code is not equal "X" and the value assigned to TOTFLT is greater than 0 and less than 100
THEN	
TOTFLT_VALID = TRUE;	-Then assign TRUE to TOTFLT_VALID
RULE USER_DEFINED_CONSTRAINT_TOTFLT_3	
IF	
EXCD <> X AND TOTFLT < 1 OR TOTFLT > 99	-If Exception Code is not equal "X" and the value assigned to TOTFLT is less than 1 or greater than 99
THEN	
TOTFLT_VALID = FALSE;	-Then assign FALSE to TOTFLT_VALID

Figure 4.1 "Backward" Chaining

in its conclusion. If the value assigned to EXCD is X, USER_DEFINED_CONSTRAINT_TOTFLT_1 is fired and the value for

TOTFLT becomes null. On the other hand if the value of EXCD is not equal to X, then the first rule is passed and the second rule is applied. Once again, if the value for TOTFLT is not known, then the inference engine must look for a rule that assigns a value to TOTFLT. This pattern continues if other variables within the rule were not known. Once all the values are known, the inference engine retraces its steps and tests the original rule. In the example above if TOTFLT is 2, then rule USER_DEFINED_CONSTRAINT_TOTFLT_2 is fired and TOTFLT_VALID is assigned TRUE.

B. APPLICATION DESIGN

The front end expert system is the user's interface with the database. It is designed to perform maintenance on the database to include append, update, and delete operations. While the rules have been defined in the last chapter, this section deals with the logic needed in the application. Which questions are asked initially? Which answers lead to other questions? In the following sections we discuss each of the maintenance operations.

NOTE: While all the maintenance operations require access to all objects of the database design, no maintenance operations are allowed on the following objects; ORGANIZATION, AIRCRAFT, and AIRCREW. The security of these objects require that they be protected from either malicious or accidental destruction or corruption.

1. Append

After the user selects APPEND RECORD from the main menu, the expert system uses a system-generated dialogue with the user to generate a record for the FLIGHT object. Each attribute is checked against the integrity constraints for that specific attribute by the inference engine. Each attribute that meets the constraints imposed by the expert system is stored until the end of the transaction. If the attribute cannot meet the integrity constraints of the knowledge base, the system continues to ask the user for the attribute and offers assistance as to a valid attribute the system will accept. This feature disallows an invalid attribute and prevents the invalid record from being added to the database, since the user cannot continue until a valid attribute is entered.

The logical ordering of questions follow from the Naval Aircraft Flight Record(OPNAV 3710/4)as shown in Figure 3.1. Some of the answers that lead to other questions include the following:

- Exception Code = X
- Mission Code 1/Position 1 = 6
- Mission Code 2 = Unknown

These answers affect the logical ordering of questions to be asked. The rules from Figure 4.1 used earlier in finding TOTFLT_VALID show this ordering. If the Exception Code is

equal to X then TOTFLT is set to null. This made the attribute TOTFLT appear to be overlooked, when in fact the rule USER_DEFINED_CONSTRAINT_TOTFLT_1 fired and assigned (BLANK) to the attribute TOTFLT.

At the end of the append operation, all values assigned to the attributes are committed to the database. If at any time during the transaction the user quits, or the append operation is terminated, the attribute values are effectively rolled back to their previous values.

2. Update

This maintenance operation is probably the most critical of all the operations. Questions, that are asked in a logical order in the append operation, may not have been asked when updating the value of one attribute. The ability to change attribute values of a record requires a clear understanding of the semantics of the whole database.

The selection of the UPDATE RECORD from the main menu provides the user with another menu showing all possible Naval Aircraft Flight Records within the database to update. After selection of a record, the user is then presented with a sub-menu of all possible attributes to update. The changing of one attribute may not only fire the rule for that attribute but may also fire multiple other rules for attributes that are logically affected by the update of that attribute. For example, a Naval Aircraft Flight Record with the attribute

Exception Code equal to X designates a canceled flight and, therefore, cannot contain flight data. In the event that the canceled flight was later flown, an update to the record should ensure that all the attributes of a flight are updated. Because of this, each unique update operation fires a separate rule. This presents a logical ordering of questions, which preserves the semantic integrity of the record in conjunction with the attribute updated. Figure 4.2 is an example of one of many update rules searched to update Mission Code 1. The inference engine searches the knowledge base after a valid Mission Code 1 has been entered to provide the logic that is needed to preserve the integrity of the record. This rule could only fire after Mission Code 1 met the Integrity Constraints defined in Chapter III. No attributes are committed to the database until all attributes meet all integrity constraints as determined by the inference engine.

3. Delete

The final maintenance operation deals with purging the database of unwanted records. This requires a cascaded delete operation. This operation deletes the designated FLIGHT record and all optional records related to the deleted FLIGHT record. These relations are shown in the relational schema of Appendix C. This function is based on referential integrity and the associated concept of inclusion dependency as discussed in Chapter II. Because this operation is potentially destructive,

a confirmation message that explains the consequences of the process is displayed, and the user is given the opportunity to cancel the delete operation. This operation doesn't mark the

RULE MISSION_CODE_1_RULE_2	
IF	
FIELD_TO_UPDATE = MISSION_CODE_1 AND	-Field to Update =
MSN1_1 = 6 AND	Mission Code 1 and
EXCD <> X	-Mission Code 1
	Position 1 = 6 and
	-Exception Code = "X"
THEN	
MISSION_CODE1_RULE = USED	-Assigns USED to
TOTAL = 0	target variable
FIND HRS1_VALID	-Assigns 0 to TOTAL
MSN2_1 = (BLANK)	for Total Hours flown
MSN2_2 = (BLANK)	-Looks for HRS1_VALID
MSN2_3 = (BLANK)	-Assigns null to
HRS2 = (BLANK)	MSN2_1
MSN3_1 = (BLANK)	-Assigns null to
MSN3_2 = (BLANK)	MSN2_2
MSN3_3 = (BLANK)	-Assigns null to
HRS3 = (BLANK)	MSN2_3
FIND MISSION1_ENGHRIS_VALID	-Assigns null to
PUT FLIGHT	HRS2
CLOSE FLIGHT;	-Assigns null to
	MSN3_1
	-Assigns null to
	MSN3_2
	-Assigns null to
	MSN3_3
	-Assigns null to
	HRS3
	-Looks for
	MISSION1_ENGHRIS_VALID
	-Commits attributes to
	database
	-Closes database

Figure 4.2 Update Operation Mission Code 1

record for deletion, instead it assigns an unknown value (BLANK) to each attribute of the record and then commits these values to the associated relations.

V. CONCLUSIONS AND RECOMMENDATIONS

A. CONCLUSIONS

This thesis has addressed the issue of dynamic enforcement of integrity constraints in a relational database through the use of a front end expert system. It has also addressed the classification of integrity constraints as a framework for designing and building the front end expert system. The development of a front end expert system for the Navy's Naval Aircraft Flight Record served as the vehicle for demonstrating the feasibility of this concept in a well-defined, structured area.

Although limited in functionality, the Naval Aircraft Flight Record front end expert system was successful in maintaining semantic integrity for any given maintenance operation(insertion, deletion, and update.) Because of the atomic nature of all maintenance operations, the integrity of the database is guaranteed at all times. A separate validation program is, therefore, not required to audit the database periodically.

The use of an expert shell with an If...Then construct proved to be a viable method to test and implement the integrity constraints developed. The ability to store these rules in one central repository (knowledge base) was the most

significant benefit of using an expert shell. Any maintenance to the program itself was made easier by the ability of the user to ask why a particular response was obtained. This allowed for query of the appropriate rule and examination of the constraints imposed, therefore simplifying program maintenance.

The expert shell (VP-Expert), while user friendly, proved to be inefficient in building and supporting the atomic nature of the maintenance operations and the integrity constraints. VP-Expert was not designed to access a database efficiently. The limitation of single record access commands, such as GET and PUT, severely inhibits the performance of the shell in any query operations on medium to large databases.

The validity of using an expert system as a front end to check potential violations of one or more integrity constraints was proved. Naturally, the correctness of all values in the database could not be guaranteed. Any semantic integrity system could only ensure that the data in the database meet the integrity constraints defined in the system.

B. RECOMMENDATIONS

Initially, this researcher attempted to use an expert shell other than VP-Expert to develop the front end system. A Structured Query Language Interface (VP-Expert/SQL) was the first choice. It was hoped that using this system would provide a powerful tool for the enforcement of integrity


constraints within a relational database. However, this software proved to be unstable and was recently withdrawn, along with all technical support. This was unfortunate, but SQL should still be considered a feasible tool for follow-up research in this area. SQL would enable subqueries and join operations and eliminate many of the inefficiencies inherent to the system (i.e., loops, nested loops. see Appendix E)

The prototype front end expert system developed in this thesis resulted in a knowledge base of approximately 150 rules. If the number of rules increase, the opportunity for redundant and possibly conflicting rules would multiply. This would inhibit the process of revalidating the system after making changes to the knowledge base. The importance of checking the knowledge base becomes even greater as this happens.

Other follow-up research may include the feasibility of using an object oriented database in providing semantic integrity. Object oriented languages provide for the notion of objects, classes, and inheritance. As opposed to tuples in the relational model, objects have an identity which is independent of their value. This characteristic is central to the domain concept and should enhance this approach to enforce integrity.

APPENDIX A

NAVAL AIRCRAFT FLIGHT RECORD OBJECT DIAGRAMS

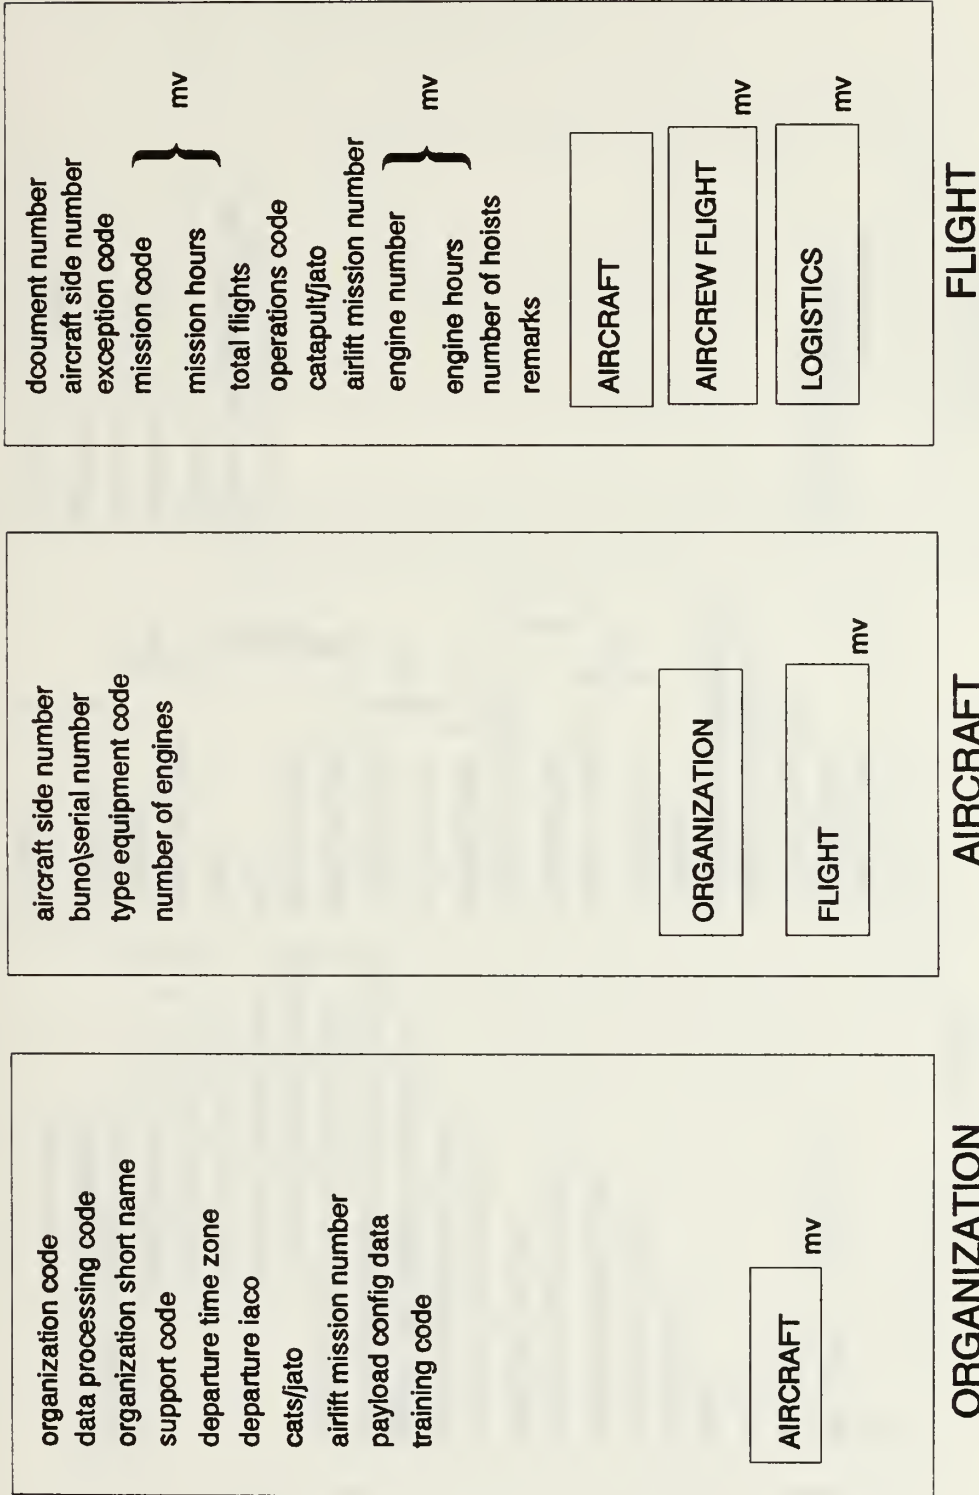

ssn	
last name	
first initial	
service	
grade	
organization	
natops qual exp date	
medical expiration date	
instrument qual exp date	
water qual exp date	
psychology qual exp date	
assigned syllabus	
syllabus status code	
aircrew status code	
exception code	

AIRCREW FLIGHT

mv

AIRCREW

first pilot time	
co-pilot time	
special crew time	
actual instrument time	
simulated instrument time	
night time	
type landing	
number landings	
type approach	
number approaches	
training code	
training area	
training hours	
ordnance code	
delivery code	
runs	
score	
misc data code	
misc data	

AIRCREW

FLIGHT

AIRCREW FLIGHT

leg number	
time zone	

DEPARTURE

ARRIVAL

FLIGHT

LOGISTICS

departure time	
departure date	
departure icao	
delay departure code	} mv
delay departure hours	
passenger priority	} mv
confirmed payload cargo	
opportune payload passenger	
opportune payload cargo	
opportune payload code	} mv
maximum passengers	
maximum cargo	

LOGISTICS

DEPARTURE

arrival time	
arrival date	
arrival icao	
system status	
distance	
delay arrival code	} mv
delay arrival hours	

LOGISTICS

ARRIVAL

APPENDIX B

NAVAL AIRCRAFT FLIGHT RECORD OBJECT SPECIFICATIONS

Object Definitions

FLIGHT OBJECT

document number; docnum
aircraft side number; sidenum
exception code; excd
mission code; msn MV
mission hours; hours MV
total flights; totflt
operations code; ops
catapult/jato; cj
airlift mission number; misnum
engine number; engnum MV
engine hours; hours MV
number of hoists; numhoists
remarks; remarks
AIRCRAFT; AIRCRAFT object; SUBSET [aircraft side number]
AIRCREW FLIGHT; AIRCREW FLIGHT object, MV
LOGISTICS; LOGISTICS object; MV

Domain Definitions

docnum;
Text 7
Unique number for organization's Naval Flight Record
sidenum;
Numeric 5
Unique number of an organizations aircraft
excd;
Text 1
Code to record other than routine flight
msn;
Text 3, mask FGS,
 where F is the Flight Purpose Code - numeric
 G is the General Purpose Code - alpha
 S is the Specific Purpose Code - numeric
Unique mission code for a specific flight
hours;
Numeric 3, mask 99.9
Hours dedicated to performance of mission
totflt;
Numeric 2
Total number of flights
ops;
Text 1
Code for ship/shore operational scenario

ci;

Numeric 1

Total number of catapult/jet assisted takeoff launches

misnum;

Text 9, mask ORGDATENN,

Where ORG is the organization code - Text

DATE is the julian date - numeric

NN is 01-99 sequentially assigned

engnum;

Numeric 1

Unique engine number

numhoists;

Numeric 2

Total number of hoists on a flight


remarks;

Text 15


Used as needed

APPENDIX C

NAVAL AIRCRAFT FLIGHT RECORD RELATIONAL DIAGRAMS

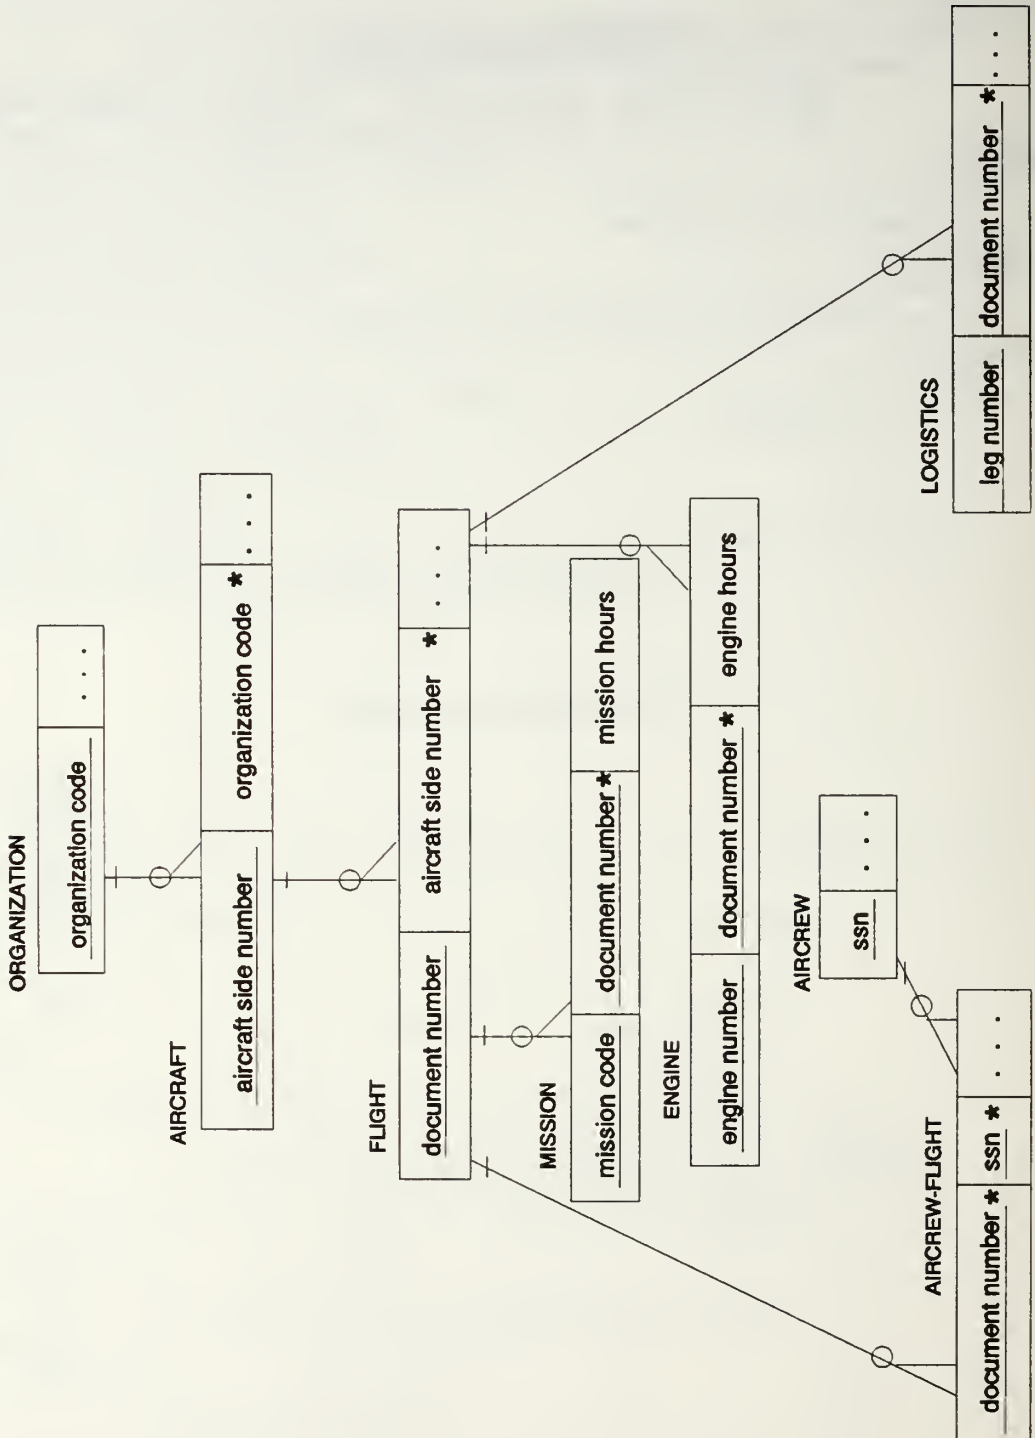

AIRCREW-FLIGHT

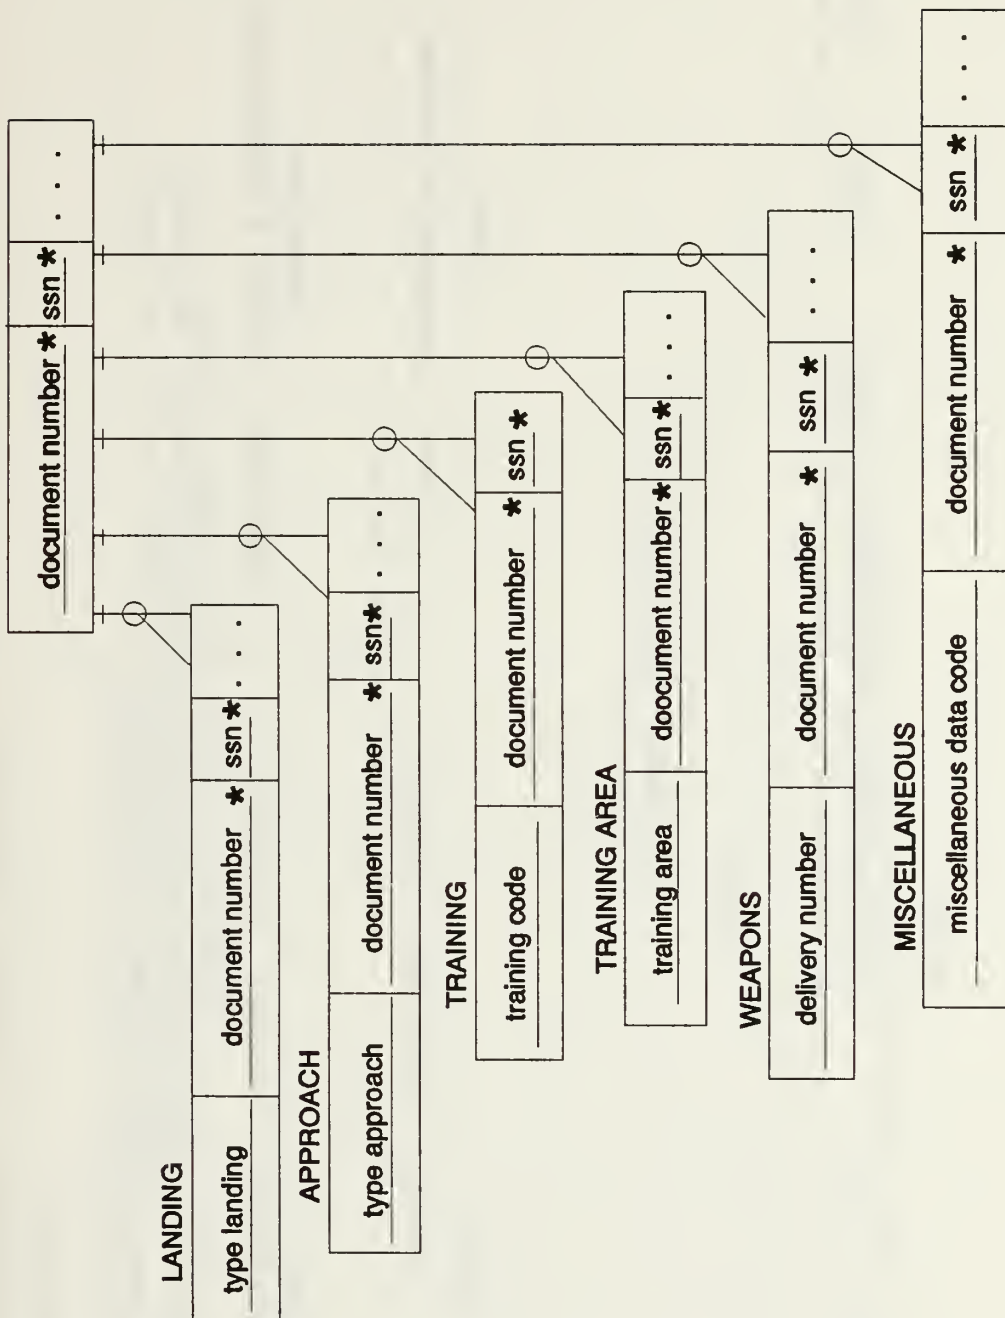

FLIGHT

document number	aircraft side number *	. . .
-----------------	------------------------	-------

LOGISTICS

leg number	document number *	. . .
------------	-------------------	-------

DEPARTURE

leg number	document number *	departure time	. . .
------------	-------------------	----------------	-------

PASSENGER

passenger priority	leg number *	document number *
--------------------	--------------	-------------------

PAYLOAD

opportune payload code	leg number *	document number *
------------------------	--------------	-------------------

DEPARTURE DELAY

delay departure code	leg number *	document number *	. . .
----------------------	--------------	-------------------	-------

ARRIVAL

leg number	document number *	arrival time	. . .
------------	-------------------	--------------	-------

ARRIVAL DELAY

delay arrival code	leg number *	document number *	. . .
--------------------	--------------	-------------------	-------

APPENDIX D
SESSION WITH NAVAL AIRCRAFT FLIGHT RECORD EXPERT SYSTEM

THIS IS A FRONT END INTEGRITY EXPERT SYSTEM TO ENABLE
THE ACCURATE COLLECTION OF INFORMATION FOR THE NAVYS
AIRCRAFT FLIGHT RECORD, OPNAV 3710/4.

PRESS ANY KEY TO BEGIN...

1Help 2Go 3WhatIf 4Variable 5Rule 6Set 7Edit 8Quit
1Help 2How? 3Why? 4Slow 5Fast 6Quit

CHOOSE A TASK TO PERFORM ON THE DATABASE.	
APPEND RECORD ◀	DELETE RECORD
DISPLAY RECORD	UPDATE RECORD
	EXIT
ENTER THE NEW DOCUMENT NUMBER.	
?	
YOU WILL NOT BE ABLE TO PROCEED UNLESS YOU ENTER A DOCUMENT NUMBER.	
ENTER THE NEW DOCUMENT NUMBER.	
A000001	
PLEASE INDICATE THE SIDE NUMBER OF THE AIRCRAFT.	
?	
YOU WILL NOT BE ABLE TO PROCEED UNLESS YOU ENTER A AIRCRAFT SIDE NUMBER.	
PLEASE INDICATE THE SIDE NUMBER OF THE AIRCRAFT.	
045	
NO AIRCRAFT EXISTS IN THE ORGANIZATION WITH THE SIDE NUMBER 045.	
PLEASE INDICATE THE SIDE NUMBER OF THE AIRCRAFT.	
051■	

Enter to select ? & Enter for Unknown /Q to quit

ENTER AN EXCEPTION CODE OR <SPACE> FOR NONE.

F

YOU NEED TO ENTER A VALID EXCEPTION CODE TO CONTINUE.

ENTER a C, D, X, OR <SPACE>

ENTER AN EXCEPTION CODE OR <SPACE> FOR NONE.

D

ENTER A MISSION 1 CODE, HIT ENTER AFTER EACH POSITION ENTRY.

7

YOU MUST ENTER A NUMBER FROM 1 TO 6.

ENTER A MISSION 1 CODE, HIT ENTER AFTER EACH POSITION ENTRY.

1

ENTER A MISSION 1 CODE, HIT ENTER AFTER EACH POSITION ENTRY

1 ENTER SECOND POSITION

2

Enter to select ? & Enter for Unknown /Q to quit

POSITION 2 MUST BE R, A-I, OR N-P. PRESS ENTER TO CONTINUE.

ENTER A MISSION 1 CODE, HIT ENTER AFTER EACH POSITION ENTRY
 1 ENTER SECOND POSITION
 R
 ENTER A MISSION 1 CODE, HIT ENTER AFTER EACH POSITION ENTRY
 1R ENTER THIRD POSITION
 1
 1R1 PRESS ANY KEY TO CONTINUE
 ENTER THE HOURS FLOWN ON MISSION 1.
 100
 YOU MUST ENTER A NUMBER FROM 00.1 TO 72.0
 ENTER THE HOURS FLOWN ON MISSION 1.
 10.0
 ENTER A MISSION 2 CODE, HIT ENTER AFTER EACH POSITION ENTRY
 6

Enter to select ? & Enter for Unknown /Q to quit

1R ENTER THIRD POSITION

1

1R1 PRESS ANY KEY TO CONTINUE
ENTER THE HOURS FLOWN ON MISSION 1.
100

YOU MUST ENTER A NUMBER FROM 00.1 TO 72.0
ENTER THE HOURS FLOWN ON MISSION 1.
10.0

ENTER A MISSION 2 CODE, HIT ENTER AFTER EACH POSITION ENTRY
6

YOU MUST ENTER A NUMBER FROM 1 TO 5.
ENTER A MISSION 2 CODE, HIT ENTER AFTER EACH POSITION ENTRY
2

ENTER A MISSION 2 CODE, HIT ENTER AFTER EACH POSITION ENTRY
2 ENTER SECOND POSITION

A■

Enter to select ? & Enter for Unknown /Q to quit

POSITION 2 MUST BE IN THE RANGE OF J-R. PRESS ENTER TO CONTINUE.

ENTER A MISSION 2 CODE, HIT ENTER AFTER EACH POSITION ENTRY
2 ENTER SECOND POSITION
J

ENTER A MISSION 2 CODE, HIT ENTER AFTER EACH POSITION ENTRY
2J ENTER THIRD POSITION
W

YOU MUST ENTER A NUMBER FROM 0 TO 9.
ENTER A MISSION 2 CODE, HIT ENTER AFTER EACH POSITION ENTRY
2J ENTER THIRD POSITION
2

2J2 PRESS ANY KEY TO CONTINUE
ENTER THE HOURS FLOWN ON MISSION 2.
70

YOU MUST ENTER A NUMBER FROM 00.1 TO 62
ENTER THE HOURS FLOWN ON MISSION 2.
7.0

Enter to select ? & Enter for Unknown /Q to quit

ENTER A MISSION 3 CODE, HIT ENTER AFTER EACH POSITION ENTRY

?

ENTER THE TOTAL NUMBER OF FLIGHTS.

?

YOU MUST ENTER A NUMBER FROM 1 TO 99
ENTER THE TOTAL NUMBER OF FLIGHTS.

2

ENTER THE SHIP/FIELD OPERATIONS CODE.

W

YOU NEED TO ENTER AN A, B, 1, OR 2.
ENTER THE SHIP/FIELD OPERATIONS CODE.

1

ENTER THE NUMBER OF AIRCRAFT HOISTS.

?■

Enter to select ? & Enter for Unknown /Q to quit

ENTER HOURS FOR ENGINE 1.
150

YOU MUST ENTER ENGINE HOURS BETWEEN 00.1 AND 17.0.
ENTER HOURS FOR ENGINE 1.
15.0

ENTER HOURS FOR ENGINE 2.
17.0

ENTER HOURS FOR ENGINE 3.
17.0

ENTER HOURS FOR ENGINE 4.
17.0■

Enter to select ? & Enter for Unknown /Q to quit

CHOOSE A TASK TO PERFORM ON THE DATABASE.		
APPEND RECORD	UPDATE RECORD	DELETE RECORD
DISPLAY RECORD ◀	EXIT	
WHICH NAVAL AIRCRAFT FLIGHT RECORD DO YOU WANT TO VIEW.		
NONE	A000001 ◀	A000002

NAVAL AIRCRAFT FLIGHT RECORD

NO. A000001												
AIRCRAFT DATA												
51	D	154792	APBD	VP5	1R1	10.0	2J2	7.0	AL	2	1	CAT/
SIDE	E	BUNO/SER	TEC	ORG	MSN1	HRS1	MSN2	HRS2	MSN3	HRS3	TOT	O
NO.	X					TOTAL MISSION REQ DATA				CODE	FLT	P
												JATO
												S

AIRLIFT MISSION NO.	NO.
	HOISTS

ENGINE NO1	ENGINE HOURS	15.0
ENGINE NO2	ENGINE HOURS	17.0
ENGINE NO3	ENGINE HOURS	17.0
ENGINE NO4	ENGINE HOURS	17.0

PRESS ANY KEY TO CONTINUE.....

CHOOSE A TASK TO PERFORM ON THE DATABASE.
APPEND RECORD UPDATE RECORD ◀ DELETE RECORD
DISPLAY RECORD EXIT
WHICH NAVAL AIRCRAFT FLIGHT RECORD DO YOU WANT TO UPDATE.
NONE A000001 ◀ A000002

YOU HAVE SELECTED RECORD NO. A000001 TO UPDATE.

SELECT WHICH FIELD YOU WANT TO UPDATE.

DOCUMENT NUMBER

SIDE NUMBER

EXCEPTION CODE ◀

MISSION CODE 1

MISSION 1 HOURS

MISSION CODE 2

MISSION 2 HOURS

MISSION CODE 3

MISSION 3 HOURS

TOTAL FLIGHTS

SHIP FIELD OPERATION

CATAPULT JATO LAUNCH

AIRLIFT MISSION NUMB

NUMBER OF HOISTS

ENGINE HOURS

DONE

THE EXCEPTION CODE IS CURRENTLY D

ENTER AN EXCEPTION CODE OR <SPACE> FOR NONE.

X

ENTER A MISSION 1 CODE, HIT ENTER AFTER EACH POSITION ENTRY.

1

ENTER A MISSION 1 CODE, HIT ENTER AFTER EACH POSITION ENTRY

1 ENTER SECOND POSITION

R■

Enter to select ? & Enter for Unknown /Q to quit

POSITION 2 MUST BE N, OR O. PRESS ENTER TO CONTINUE.

ENTER A MISSION 1 CODE, HIT ENTER AFTER EACH POSITION ENTRY
1 ENTER SECOND POSITION

N

ENTER A MISSION 1 CODE, HIT ENTER AFTER EACH POSITION ENTRY
1N ENTER THIRD POSITION

1

1N1 PRESS ANY KEY TO CONTINUE

NAVAL AIRCRAFT FLIGHT RECORD

NO. A000001
 AIRCRAFT DATA
 51 X 154792 APBD VP5 1N1
 SIDE E BUNO/SER TEC ORG MSN1 HRS1 MSN2 HRS2 MSN3 HRS3
 NO. X TOTAL MISSION REQ DATA
 C
 D

AL SUPT CODE
 TOT FLT
 O P S
 CAT/ JATO

AIRLIFT MISSION NO. NO.
 HOISTS

ENGINE NO ENGINE HOURS

PRESS ANY KEY TO CONTINUE.....

```

CHOOSE A TASK TO PERFORM ON THE DATABASE.
APPEND RECORD      UPDATE RECORD ◀
DISPLAY RECORD
                                DELETE RECORD ◀

WHICH NAVAL AIRCRAFT FLIGHT RECORD DO YOU WANT TO DELETE.
NONE               A000001
                                A000002 ◀

THIS ACTION WILL DELETE THE WHOLE FLIGHT RECORD! DO YOU WANT TO CONTINUE?
YES ◀              NO

CHOOSE A TASK TO PERFORM ON THE DATABASE.
APPEND RECORD      UPDATE RECORD
DISPLAY RECORD ◀   DELETE RECORD

WHICH NAVAL AIRCRAFT FLIGHT RECORD DO YOU WANT TO VIEW.
NONE               A000001

```

↑ ↓ → Enter to select END to complete /Q to Quit ? for Unknown

APPENDIX E

NAVAL AIRCRAFT FLIGHT RECORD RULE-BASE

```
! Naval Aircraft Flight Record Expert System
! By George J. Salitsky
! Naval Postgraduate School
! This program is a prototype Front End Expert System
! designed to maintain semantic integrity within the
! database according to the integrity constraints specified
! in the knowledge base.
```

```
AUTOQUERY;
RUNTIME;
ENDOFF;
```

ACTIONS

```
FORMAT TOTAL, 4.1
DISPLAY "THIS IS A FRONT END INTEGRITY EXPERT SYSTEM TO
        ENABLE THE ACCURATE COLLECTION OF INFORMATION FOR THE
        NAVYS AIRCRAFT FLIGHT RECORD, OPNAV 3710/4.
```

PRESS ANY KEY TO BEGIN...~"

```
! loop to ask user which maintenance operation to perform on
! the database. whichtask is the main menu, options include:
!     1. APPEND
!     2. UPDATE
!     3. DELETE
!     4. DISPLAY
!     5. EXIT
```

```
CLS
RESET WHICHTASK
    WHILETRUE WHICHTASK <> EXIT THEN
        RESET ALL
! set up variable BLANK
    CHR 32, BLANK
    FIND WHICHTASK
    FIND TASKCOMPLETED
END;
```

```
! ***** APPEND OPERATION *****
```

```
RULE APPEND_RECORD
IF
```

```

        WHICHTASK = APPEND_RECORD
THEN
    FIELD_TO_UPDATE = NONE
    TASKCOMPLETED = YES
    RESET DOCNUM_NEW
! ask user for document number
    FIND DOCNUM_NEW
    RESET DOCNUM_NOT_MISSING
! cannot allow a null value for document number
    FIND DOCNUM_NOT_MISSING
    RESET DOCNUM_DUPLICATE
! cannot allow duplicate document numbers
    FIND DOCNUM_DUPLICATE
    DOCNUM = (DOCNUM_NEW)
    CLOSE FLIGHT
    RESET SIDENUM_NEW
! ask user for aircraft side number
    FIND SIDENUM_NEW
    RESET SIDENUM_NOT_MISSING
! cannot allow a null value for side number
    FIND SIDENUM_NOT_MISSING
    RESET SIDENUM_EXISTS
! side number must match an aircraft in organization
    FIND SIDENUM_EXISTS
    CLOSE AIRCRAFT
    RESET EXCD
! ask user for exception code
    FIND EXCD
    RESET EXCD_VALID
! only certain exception codes allowed
    FIND EXCD_VALID
! find mission code 1 position 1
    CLS
    RESET MSN1_1
    FIND MSN1_1
    RESET MSN11_VALID
    FIND MSN11_VALID
! find mission code 1 position 2
    CLS
    RESET MSN1_2
    FIND MSN1_2
    RESET MSN12_VALID
    FIND MSN12_VALID
! find mission code 1 position 3
    CLS
    RESET MSN1_3
    FIND MSN1_3
    RESET MSN13_VALID
    FIND MSN13_VALID
    CLS
! find mission 1 hours

```

```

RESET CHECK
FIND CHECK
TEMPHRS1 = 0
TEMPHRS2 = 0
TEMPHRS3 = 0
TOTHR = 72.0
SUBTOTAL = 0
RESET HRS1_VALID
FIND HRS1_VALID
! find mission code 2 position 1
CLS
RESET MSN21_VALID
FIND MSN21_VALID
! find mission code 2 position 2
CLS
RESET MSN22_VALID
FIND MSN22_VALID
! find mission code 2 position 3
CLS
RESET MSN23_VALID
FIND MSN23_VALID
CLS
! find mission 2 hours
RESET HRS2_VALID
FIND HRS2_VALID
! find mission code 3 position 1
CLS
RESET MSN31_VALID
FIND MSN31_VALID
! find mission code 3 position 2
CLS
RESET MSN32_VALID
FIND MSN32_VALID
! find mission code 3 position 3
CLS
RESET MSN33_VALID
FIND MSN33_VALID
CLS
! find mission 3 hours
RESET HRS3_VALID
FIND HRS3_VALID
CLS
! find total flights
RESET TOTFLT_VALID
FIND TOTFLT_VALID
CLS
! find ship/field operations code
RESET OPS_VALID
FIND OPS_VALID
CLS
! find catapult/jato launches as necessary

```



```

    GET ALL, ORGAN, CATSJATO
    RESET CJ_VALID
    FIND CJ_VALID
    CLOSE ORGAN
    CLS
! find airlift mission number as necessary
    GET ALL, ORGAN, AIRLIFT
    RESET AIRLIFT_VALID
    FIND AIRLIFT_VALID
    CLOSE ORGAN
    CLS
! find number of hoists
    RESET NUMHOIST_VALID
    FIND NUMHOIST_VALID
    CLS
! append new record to flight database
    APPEND FLIGHT
! loop to get engine hours for aircraft on flight
! determined by aircraft record
    GET SIDENUM = (SIDENUM_NEW), AIRCRAFT, ENGINES
    CLOSE AIRCRAFT
    RESET ENGHRS_VALID
    FIND ENGHRS_VALID
    CLS;

! ***** UPDATE OPERATION *****

RULE UPDATE_DOCUMENT
IF
    WHICHTASK = UPDATE_RECORD
THEN
    TASKCOMPLETED = YES
    RESET DOCNUM_UPDATE
    MENU DOCNUM_UPDATE, ALL, FLIGHT, DOCNUM
! ask user for document number from menu of all document
! numbers
    FIND DOCNUM_UPDATE
    MRESET DOCNUM_UPDATE
    RESET UPDATE
    FIND UPDATE;

! determine if there are any Flight Records to update
RULE UPDATE
IF
    DOCNUM_UPDATE = NONE AND
    UPDATE = UNKNOWN
THEN
! no flight records to update
    UPDATE = NO
    DISPLAY "          THERE IS NO FLIGHT RECORD TO UPDATE.

```

PRESS ANY KEY TO CONTINUE

~"

```
CLS
ELSE
! flight records available to update
UPDATE = YES
GET DOCNUM_UPDATE = DOCNUM, FLIGHT, ALL
CLOSE FLIGHT
CLS
DISPLAY " YOU HAVE SELECTED RECORD NO. {DOCNUM_UPDATE}
TO UPDATE."      RESET FIELD_TO_UPDATE
! ask user for attribute to update by menu field_to_update
WHILETRUE FIELD_TO_UPDATE <> DONE THEN
    RESET FIELD_TO_UPDATE
    RESET UPDATE_COMPLETED
    FIND FIELD_TO_UPDATE
    FIND UPDATE_COMPLETED
END;

! ***** UPDATE DOCUMENT NUMBER *****

RULE UPDATE_DOCUMENT_NUMBER
IF
    FIELD_TO_UPDATE = DOCUMENT_NUMBER
THEN
    UPDATE_COMPLETED = YES
! display current document number
    DISPLAY "{DOCNUM_UPDATE} IS CURRENTLY THE DOCUMENT
        NUMBER.
    "
    CLOSE FLIGHT
    RESET DOCNUM_NEW
! ask user for document number
    FIND DOCNUM_NEW
    RESET DOCNUM_NOT_MISSING
! cannot allow a null value for document number
    FIND DOCNUM_NOT_MISSING
    RESET DOCNUM_DUPLICATE
! cannot allow duplicate document numbers
    FIND DOCNUM_DUPLICATE
    RESET DOCNUM_NOT_MISSING
    RESET DOCNUM_DUPLICATE
    CLOSE FLIGHT
    GET DOCNUM_UPDATE = DOCNUM, FLIGHT, DOCNUM
    DOCNUM = (DOCNUM_NEW)
    PUT FLIGHT
    CLOSE FLIGHT
! change document number on ENGINE records
    GET DOCNUM_UPDATE = DOCNUM, FLTENG, DOCNUM
    WHILETRUE DOCNUM <> UNKNOWN THEN
        DOCNUM = (DOCNUM_NEW)
```

```

        PUT FLTENG
        GET DOCNUM_UPDATE = DOCNUM, FLTENG, DOCNUM
    END
    CLOSE FLTENG
    FIELD_TO_UPDATE = DONE;

```

! *** UPDATE AIRCRAFT SIDE NUMBER *******

```

RULE UPDATE_SIDE_NUMBER
IF
    FIELD_TO_UPDATE = SIDE_NUMBER
THEN
    UPDATE_COMPLETED = YES
    GET DOCNUM_UPDATE = DOCNUM, FLIGHT, SIDENUM
    ! display current side number
    DISPLAY "THE AIRCRAFT SIDE NUMBER IS CURRENTLY
{SIDENUM}.
"
    CLOSE FLIGHT
    RESET SIDENUM_UPDATE
    ! ask user for new aircraft side number
    FIND SIDENUM_UPDATE
    RESET SIDENUM_UPDATE_NOT_MISSING
    ! cannot allow a null value for side number
    FIND SIDENUM_UPDATE_NOT_MISSING
    RESET SIDENUM_UPDATE_EXISTS
    ! side number must match an aircraft in organization
    FIND SIDENUM_UPDATE_EXISTS
    RESET SIDENUM_UPDATE_EXISTS
    RESET SIDENUM_UPDATE_NOT_MISSING
    CLOSE FLIGHT
    GET DOCNUM_UPDATE = DOCNUM, FLIGHT, SIDENUM
    SIDENUM = (SIDE)
    PUT FLIGHT
    CLOSE FLIGHT
    FIELD_TO_UPDATE = DONE;

```

! *** UPDATE EXCEPTION CODE *******

```

RULE UPDATE_EXCEPTION_CODE
IF
    FIELD_TO_UPDATE = EXCEPTION_CODE
THEN
    UPDATE_COMPLETED = YES
    ! display current exception code
    DISPLAY "THE EXCEPTION CODE IS CURRENTLY {EXCD}
"
    RESET EXCD_NEW
    FIND EXCD_NEW
    ! find if new exception code meets constraints
    RESET UPDATE_EXCD_VALID

```

```

        FIND UPDATE_EXCD_VALID
! from new exception code determine logic to keep database
! in a valid state
        RESET EXCD_RULE
        FIND EXCD_RULE;

! ***** EXCEPTION CODE LOGIC *****
! ***** RULE 1 *****
!      change exception code to X (canceled flight)

RULE EXCEPTION_RULE_1
IF
    FIELD_TO_UPDATE <> MISSION_1_CODE AND
    FIELD_TO_UPDATE = EXCEPTION_CODE AND
    EXCD_NEW = X AND
    EXCD_RULE = UNKNOWN
THEN
    EXCD_RULE = TRUE
    GET DOCNUM_UPDATE = DOCNUM, FLIGHT, EXCD
    RESET EXCD
    EXCD = (EXCD_NEW)
! need to get valid mission code 1
    RESET MSN1_1
    FIND MSN1_1
    RESET MSN11_VALID
    FIND MSN11_VALID
    CLS
    RESET MSN1_2
    FIND MSN1_2
    RESET MSN12_VALID
    FIND MSN12_VALID
    CLS
    RESET MSN1_3
    FIND MSN1_3
    RESET MSN13_VALID
    FIND MSN13_VALID
    CLS
    RESET MSN11_VALID
    RESET MSN12_VALID
    RESET MSN13_VALID
! set all other flight attributes are null
    HRS1 = (BLANK)
    MSN2_1 = (BLANK)
    MSN2_2 = (BLANK)
    MSN2_3 = (BLANK)
    HRS2 = (BLANK)
    MSN3_1 = (BLANK)
    MSN3_2 = (BLANK)
    MSN3_3 = (BLANK)
    HRS3 = (BLANK)
    TOTFLT = (BLANK)

```

```

OPS = (BLANK)
CJ = (BLANK)
MISNUM = (BLANK)
NUMHOISTS = (BLANK)
REMARKS = (BLANK)
PUT FLIGHT
CLOSE FLIGHT
! loop to remove related ENGINE records
  GET DOCNUM_UPDATE = DOCNUM, FLTENG, ALL
  WHILETRUE ENGNUM <> UNKNOWN THEN
    DOCNUM = (BLANK)
    ENGNUM = (BLANK)
    ENGHRS = (BLANK)
    PUT FLTENG
    GET DOCNUM_UPDATE = DOCNUM, FLTENG, ALL
  END
  CLOSE FLTENG
  FIELD_TO_UPDATE = DONE;

! ***** EXCEPTION CODE LOGIC *****
! ***** RULE 2 *****
! change exception code from X (canceled flight)

RULE EXCEPTION_RULE_2
IF
  FIELD_TO_UPDATE = EXCEPTION_CODE AND
  EXCD_RULE = UNKNOWN AND
  EXCD_NEW <> X AND
  EXCD = X
THEN
  EXCD_RULE = TRUE
  GET DOCNUM_UPDATE = DOCNUM, FLIGHT, EXCD
  DOCNUM = (DOCNUM_UPDATE)
  RESET EXCD
  EXCD = (EXCD_NEW)
  RESET MSN1_1
  FIND MSN1_1
  RESET MSN11_VALID
  FIND MSN11_VALID
! find mission code 1 position 2
  CLS
  RESET MSN1_2
  FIND MSN1_2
  RESET MSN12_VALID
  FIND MSN12_VALID
! find mission code 1 position 3
  CLS
  RESET MSN1_3
  FIND MSN1_3
  RESET MSN13_VALID
  FIND MSN13_VALID

```



```

CLS
! find mission 1 hours
  RESET CHECK
  FIND CHECK
  TEMPHRS1 = 0
  TEMPHRS2 = 0
  TEMPHRS3 = 0
  TOTHR = 72.0
  SUBTOTAL = 0
  RESET HRS1_VALID
  FIND HRS1_VALID
! find mission code 2 position 1
  CLS
  RESET MSN21_VALID
  FIND MSN21_VALID
! find mission code 2 position 2
  CLS
  RESET MSN22_VALID
  FIND MSN22_VALID
! find mission code 2 position 3
  CLS
  RESET MSN23_VALID
  FIND MSN23_VALID
  CLS
! find mission 2 hours
  RESET HRS2_VALID
  FIND HRS2_VALID
! find mission code 3 position 1
  CLS
  RESET MSN31_VALID
  FIND MSN31_VALID
! find mission code 3 position 2
  CLS
  RESET MSN32_VALID
  FIND MSN32_VALID
! find mission code 3 position 3
  CLS
  RESET MSN33_VALID
  FIND MSN33_VALID
  CLS
! find mission 3 hours
  RESET HRS3_VALID
  FIND HRS3_VALID
  CLS
! find total flights
  RESET TOTFLT_VALID
  FIND TOTFLT_VALID
  CLS
! find ship/field operations code
  RESET OPS_VALID
  FIND OPS_VALID

```

```

CLS
! find catapult/jato launches as necessary
  GET ALL, ORGAN, CATSJATO
  RESET CJ_VALID
  FIND CJ_VALID
  CLOSE ORGAN
  CLS
! find airlift mission number as necessary
  GET ALL, ORGAN, AIRLIFT
  RESET AIRLIFT_VALID
  FIND AIRLIFT_VALID
  CLOSE ORGAN
  CLS
! find number of hoists
  RESET NUMHOIST_VALID
  FIND NUMHOIST_VALID
! append new record to flight database
  PUT FLIGHT
  CLOSE FLIGHT
! find engine hours for aircraft on flight
  GET SIDE = (SIDENUM), AIRCRAFT, ENGINES
  CLOSE AIRCRAFT
  RESET UPDATE_ENGHRIS_VALID
  FIND UPDATE_ENGHRIS_VALID
  CLS
  FIELD_TO_UPDATE = DONE;

! ***** EXCEPTION CODE LOGIC *****
! ***** RULE 2 *****
! change exception code from a value not X to a value
! not X

```

```

RULE EXCEPTION_RULE_3

```

```

IF

```

```

  FIELD_TO_UPDATE = EXCEPTION_CODE AND
  EXCD_RULE = UNKNOWN AND
  EXCD_NEW <> X AND
  EXCD <> X

```

```

THEN

```

```

  EXCD_RULE = TRUE
  CLS
  GET DOCNUM_UPDATE = DOCNUM, FLIGHT, ALL
  EXCD = (EXCD_NEW)
  PUT FLIGHT
  CLOSE FLIGHT
  CLS
  FIELD_TO_UPDATE = DONE;

```

```

! ***** UPDATE MISSION CODE 1 *****

```

```

RULE UPDATE_MISSION_CODE_1

```

```

IF
    FIELD_TO_UPDATE = MISSION_CODE_1
THEN
    UPDATE_COMPLETED = YES
! display current mission code 1
    DISPLAY "THE MISSION NUMBER 1 CODE IS CURRENTLY
{MSN1_1}{MSN1_2}{MSN1_3}

```

PRESS ANY KEY TO CONTINUE~"

```

! find mission code 1 position 1
    CLS
    GET DOCNUM_UPDATE = DOCNUM, FLIGHT, EXCD
    RESET EXCD_VALUE
    FIND EXCD_VALUE
! find mission code 1 position 1
    RESET MSN1_1
    FIND MSN1_1
    RESET MSN11_VALID
    FIND MSN11_VALID
! find mission code 1 position 2
    CLS
    RESET MSN1_2
    FIND MSN1_2
    RESET MSN12_VALID
    FIND MSN12_VALID
! find mission code 1 position 3
    CLS
    RESET MSN1_3
    FIND MSN1_3
    RESET MSN13_VALID
    FIND MSN13_VALID
    CLS
! from new mission code 1 determine logic to keep database
! in a valid state
    RESET MISSION_CODE1_RULE
    FIND MISSION_CODE1_RULE;

! ***** MISSION CODE 1 LOGIC *****
! ***** RULE 1 *****
! exception code is X

RULE MISSION_CODE_1_RULE_1
IF
    FIELD_TO_UPDATE = MISSION_CODE_1 AND
    EXCD = X

```

```

THEN
    MISSION_CODE1_RULE = USED
    PUT FLIGHT
    CLOSE FLIGHT
    FIELD_TO_UPDATE = DONE;

! ***** MISSION CODE 1 LOGIC *****
! ***** RULE 2 *****
! mission code 1 position 1 is 6 and exception code
! is not X

RULE MISSION_CODE_1_RULE_2
IF
    FIELD_TO_UPDATE = MISSION_CODE_1 AND
    MSN1_1 = 6 AND
    EXCD <> X
THEN
    MISSION_CODE1_RULE = USED
    CLS
    ! find mission 1 hours
    RESET CHECK
    FIND CHECK
    TOTAL = 0
    RESET HRS1_VALID
    FIND HRS1_VALID
    RESET MSN2_1
    ! no other mission codes allowed
    MSN2_1 = (BLANK)
    RESET MSN2_2
    MSN2_2 = (BLANK)
    RESET MSN2_3
    MSN2_3 = (BLANK)
    RESET HRS2
    HRS2 = (BLANK)
    RESET MSN3_1
    MSN3_1 = (BLANK)
    RESET MSN3_2
    MSN3_2 = (BLANK)
    RESET MSN3_3
    MSN3_3 = (BLANK)
    RESET HRS3
    HRS3 = (BLANK)
    PUT FLIGHT
    CLOSE FLIGHT
    ! update engine hours for aircraft
    RESET MISSION1_ENGHRS_VALID
    FIND MISSION1_ENGHRS_VALID
    FIELD_TO_UPDATE = DONE;

! loop to update engine hours resulting from updating
! mission code 1 when mission code 1 position 1 is 6

```

! and exception code is not equal to X

RULE UPDATE_MISSION_1_ENGINE_HOURS

IF

MSN1_1 = 6 AND

EXCD <> X AND

MISSION1_ENGHRIS_VALID = UNKNOWN AND

FIELD_TO_UPDATE = MISSION_CODE_1

THEN

MISSION1_ENGHRIS_VALID = TRUE

Y = 1

GET DOCNUM_UPDATE = DOCNUM AND ENGNUM = (Y), FLTENG,

ALL

WHILE TRUE ENGNUM <> UNKNOWN THEN

RESET ENGHRIS

FIND ENGHRIS

RESET ENGHRIS_VALID

RESET ENGHRIS_LOOP

FIND ENGHRIS_LOOP

Y = (Y + 1)

PUT FLTENG

CLS

GET DOCNUM_UPDATE = DOCNUM AND ENGNUM = (Y),

FLTENG, ALL

END

CLOSE FLTENG;

! *** MISSION CODE 1 LOGIC *******

! *** RULE 3 *******

**! mission code 1 position 1 is not 6 and exception code
! is not X**

RULE MISSION_CODE_1_RULE_3

IF

FIELD_TO_UPDATE = MISSION_CODE_1 AND

MSN1_1 <> 6 AND

EXCD <> X

THEN

MISSION_CODE1_RULE = USED

PUT FLIGHT

CLOSE FLIGHT

FIELD_TO_UPDATE = DONE;

! *** UPDATE MISSION HOURS 1 *******

RULE UPDATE_HRS1

IF

FIELD_TO_UPDATE = MISSION_1_HOURS

THEN

UPDATE_COMPLETED = YES

TOTAL = 0

GET DOCNUM_UPDATE = DOCNUM, FLIGHT, ALL

```

    RESET EXCD_VALUE
    FIND EXCD_VALUE
! find if mission hours 1 is valid
    RESET UPDATE_HRS1_VALID
    FIND UPDATE_HRS1_VALID
    PUT FLIGHT
    CLOSE FLIGHT
! loop to update ENGINE records after change to mission
! hours 1
    GET SIDENUM = SIDE, AIRCRAFT, ENGINES
    CLOSE AIRCRAFT
    Y = 1
    WHILE TRUE UPDATE_HRS1_VALID <> FALSE AND Y <= (ENGINES)
    THEN
        GET DOCNUM_UPDATE = DOCNUM AND ENGNUM = (Y),
        FLTENG, ALL
        RESET ENGHRS
        FIND ENGHRS
! find if engine hours is valid
        RESET ENGHRS_VALID
        RESET ENGHRS_LOOP
        FIND ENGHRS_LOOP
        Y = (Y + 1)
        PUT FLTENG
        CLS
    END
    CLOSE FLTENG
    FIELD_TO_UPDATE = DONE;

! ***** UPDATE MISSION CODE 2 *****

RULE UPDATE_MISSION_CODE_2
IF
    FIELD_TO_UPDATE = MISSION_CODE_2
THEN
    UPDATE_COMPLETED = YES
! display current mission code 2
    DISPLAY "THE MISSION NUMBER 2 CODE IS CURRENTLY
    {1MSN2_1}{1MSN2_2}{1MSN2_3}

```

PRESS ANY KEY TO CONTINUE~"

```

! find mission code 2 position 1
    CLS
    GET DOCNUM_UPDATE = DOCNUM, FLIGHT, ALL
    CLOSE FLIGHT

```



```

TOTAL = (HRS1)
! determine if you are allowed to update mission code 2
  RESET MISSION_CODE2_RULE
  FIND MISSION_CODE2_RULE
! from new mission code 2 determine logic to keep database
! in a valid state
  RESET MISSION_2_VALUE
  FIND MISSION_2_VALUE
  FIELD_TO_UPDATE = DONE;

! ***** MISSION CODE 2 ALLOWED *****
! mission code 2 not allowed if exception code is X
! or mission code 1 position 1 is equal to 6

RULE MISSION_CODE_2_RULE
IF
  FIELD_TO_UPDATE = MISSION_CODE_2 AND
  EXCD = X OR
  MSN1_1 = 6
THEN
! mission code 2 not allowed
! display message
  MISSION_CODE2_RULE = NOT_USED
  DISPLAY " YOU ARE NOT ALLOWED TO ENTER A MISSION CODE
          FOR ONE OF THE FOLLOWING REASONS:
          1. EXCEPTION CODE = X
          2. MISSION CODE 1 BEGINS WITH A 6

          PRESS ANY KEY TO CONTINUE

          ~"

  CLS
  CLOSE FLIGHT
ELSE
! mission code 2 allowed
  MISSION_CODE2_RULE = USED
  GET DOCNUM_UPDATE = DOCNUM, FLIGHT, ALL
! find mission code 2 position 1
  RESET MSN2_1
  RESET MSN2_2
  RESET MSN2_3
  RESET MSN21_VALID
  FIND MSN21_VALID
! find mission code 2 position 2
  CLS
  RESET MSN22_VALID
  FIND MSN22_VALID
! find mission code 2 position 3
  CLS
  RESET MSN23_VALID

```

```

FIND MSN23_VALID
PUT FLIGHT
CLOSE FLIGHT;

! ***** MISSION CODE 2 LOGIC *****
! ***** RULE 1 *****
!
new mission code 2 is null

RULE MISSION_CODE2_VALUE_RULE1
IF
    FIELD_TO_UPDATE = MISSION_CODE_2 AND
    MISSION_CODE2_RULE = USED AND
    SKIP = YES
THEN
    MISSION_2_VALUE = MISSING
    GET DOCNUM_UPDATE = DOCNUM, FLIGHT, ALL
! remove mission code 2, 3 along with mission hours 2, 3
    RESET MSN2_2
    MSN2_2 = (BLANK)
    RESET MSN2_3
    MSN2_3 = (BLANK)
    RESET HRS2
    HRS2 = (BLANK)
    RESET MSN3_1
    MSN3_1 = (BLANK)
    RESET MSN3_2
    MSN3_2 = (BLANK)
    RESET MSN3_3
    MSN3_3 = (BLANK)
    RESET HRS3
    HRS3 = (BLANK)
    PUT FLIGHT
    CLOSE FLIGHT
    Y = 1
! loop to update ENGINE records
    GET DOCNUM_UPDATE = DOCNUM AND ENGNUM = (Y), FLTENG,
    ALL
        WHILETRUE ENGNUM <> UNKNOWN THEN
            RESET ENGHRS
            FIND ENGHRS
            RESET ENGHRS_VALID
            RESET ENGHRS_LOOP
            FIND ENGHRS_LOOP
            Y = (Y +1)
            PUT FLTENG
            CLS
            GET DOCNUM_UPDATE = DOCNUM AND ENGNUM = (Y),
            FLTENG, ALL
        END
    CLOSE FLTENG;

```

```

! ***** MISSION CODE 2 LOGIC *****
! ***** RULE 2 *****
!           replace current mission code 2

```

```

RULE MISSION_CODE2_VALUE_RULE2

```

```

IF

```

```

    FIELD_TO_UPDATE = MISSION_CODE_2 AND
    MISSION_CODE2_RULE = USED AND
    TOTAL <> (HRS1 + HRS2 + HRS3) and
    SKIP = NO

```

```

THEN

```

```

    MISSION_2_VALUE = NOT_MISSING
    GET DOCNUM_UPDATE = DOCNUM, FLIGHT, ALL
    PUT FLIGHT
    CLOSE FLIGHT;

```

```

! ***** MISSION CODE 2 LOGIC *****
! ***** RULE 3 *****
!           mission code 2 was previously null

```

```

RULE MISSION_CODE2_VALUE_RULE3

```

```

IF

```

```

    FIELD_TO_UPDATE = MISSION_CODE_2 AND
    MISSION_CODE2_RULE = USED AND
    TOTAL = (HRS1) AND
    SKIP = NO

```

```

THEN

```

```

    MISSION_2_VALUE = NOT_MISSING
    GET DOCNUM_UPDATE = DOCNUM, FLIGHT, ALL
    CLS
    RESET CHECK
    FIND CHECK
    TEMPHRS1 = 0
    TEMPHRS2 = 0
    TEMPHRS3 = 0
    TOTHRs = 72.0
    SUBTOTAL = 0

```

```

! find mission 2 hours

```

```

    RESET HRS2
    FIND HRS2
    RESET TEST_HRS2
    WHILETRUE TEST_HRS2 = UNKNOWN OR TEST_HRS2 = NOT_TRUE
    THEN

```

```

! find if mission hours 2 is valid

```

```

    RESET TEST_HRS2
    FIND TEST_HRS2

```

```

    END
    CLS
    PUT FLIGHT
    CLOSE FLIGHT

```

```

! loop to update ENGINE records

```

```

Y = 1
GET DOCNUM_UPDATE = DOCNUM AND ENGNUM = (Y), FLTENG,
ALL
  WHILETRUE ENGNUM <> UNKNOWN THEN
    RESET ENGHRS
    FIND ENGHRS
! find if engine hours is valid
    RESET ENGHRS_VALID
    RESET ENGHRS_LOOP
    FIND ENGHRS_LOOP
    Y = (Y +1)
    PUT FLTENG
    CLS
    GET DOCNUM_UPDATE = DOCNUM AND ENGNUM = (Y),
    FLTENG, ALL
  END
CLOSE FLTENG;

! ***** MISSION CODE 2 LOGIC *****
! ***** RULE 4 *****
! mission code 2 is not allowed

RULE MISSION_CODE2_VALUE_RULE4
IF
  FIELD_TO_UPDATE = MISSION_CODE_2 AND
  MISSION_CODE2_RULE = NOT_USED
THEN
  MISSION_2_VALUE = NOT_REQUIRED
  CLS;

! ***** UPDATE MISSION HOURS 2 *****

RULE UPDATE_HRS2
IF
  FIELD_TO_UPDATE = MISSION_2_HOURS
THEN
  UPDATE_COMPLETED = YES
  GET DOCNUM_UPDATE = DOCNUM, FLIGHT, ALL
  TOTAL = (HRS1)
  CHECKSUM = (HRS1 +HRS2)
  RESET EXCD_VALUE
  FIND EXCD_VALUE
! find if mission hours 2 is valid
  RESET UPDATE_HRS2_VALID
  FIND UPDATE_HRS2_VALID
  PUT FLIGHT
  CLOSE FLIGHT
! loop to update ENGINE records
  Y = 1
  GET DOCNUM_UPDATE = DOCNUM AND ENGNUM = (Y), FLTENG,
  ALL

```

```

WHILE TRUE ENGNUM <> UNKNOWN AND UPDATE_HRS2_VALID <>
FALSE
THEN
    RESET ENGHRS
    FIND ENGHRS
    RESET ENGHRS_VALID
    RESET ENGHRS_LOOP
    FIND ENGHRS_LOOP
    Y = (Y +1)
    PUT FLTENG
    CLS
    GET DOCNUM_UPDATE = DOCNUM AND ENGNUM = (Y),
    FLTENG, ALL
END
CLOSE FLTENG
FIELD_TO_UPDATE = DONE;

```

! *** UPDATE MISSION CODE 2 *******

```

RULE UPDATE_MISSION_CODE_3
IF
    FIELD_TO_UPDATE = MISSION_CODE_3
THEN
    UPDATE_COMPLETED = YES
! display current mission code 3
    DISPLAY "THE MISSION NUMBER 3 CODE IS CURRENTLY
{1MSN3_1}{1MSN3_2}{1MSN3_3}

```

PRESS ANY KEY TO CONTINUE~"

```

! find mission code 3 position 1
    CLS
    GET DOCNUM_UPDATE = DOCNUM, FLIGHT, ALL
    CLOSE FLIGHT
    TOTAL1 = (HRS1)
    TOTAL2 = (HRS1 + HRS2)
    TOTAL = (TOTAL2)
! determine if you are allowed to update mission code 3
    RESET MISSION_CODE3_RULE
    FIND MISSION_CODE3_RULE
! from new mission code 3 determine logic to keep database
! in a valid state
    RESET MISSION_3_VALUE
    FIND MISSION_3_VALUE
    FIELD_TO_UPDATE = DONE;

```



```
! ***** MISSION CODE 3 ALLOWED *****
! mission code 3 not allowed if exception code is X
!   or mission code 1 position 1 is equal to 6 or
!   mission code 2 is null
```

```
RULE MISSION_CODE_3_RULE
```

```
IF
```

```
    FIELD_TO_UPDATE = MISSION_CODE_3 AND
    EXCD = X OR
    MSN1_1 = 6 OR
    TOTAL2 = (TOTAL1)
```

```
THEN
```

```
! mission code 3 is not allowed
```

```
! display message
```

```
    MISSION_CODE3_RULE = NOT_USED
```

```
    DISPLAY " YOU ARE NOT ALLOWED TO ENTER A MISSION CODE
```

```
FOR ONE OF THE FOLLOWING REASONS:
```

```
1.
```

```
EXCEPTION CODE = X
```

```
2. MISSION CODE 1 BEGINS WITH A 6
```

```
3. THERE IS NO MISSION 2 CODE
```

```
PRESS ANY KEY TO CONTINUE
```

```
~"
```

```
CLS
```

```
CLOSE FLIGHT
```

```
ELSE
```

```
! mission code 3 is allowed
```

```
    MISSION_CODE3_RULE = USED
```

```
    GET DOCNUM_UPDATE = DOCNUM, FLIGHT, ALL
```

```
! find mission code 3 position 1
```

```
    RESET MSN3_1
```

```
    RESET MSN3_2
```

```
    RESET MSN3_3
```

```
    RESET MSN31_VALID
```

```
    FIND MSN31_VALID
```

```
! find mission code 3 position 2
```

```
    CLS
```

```
    RESET MSN32_VALID
```

```
    FIND MSN32_VALID
```

```
! find mission code 3 position 3
```

```
    CLS
```

```
    RESET MSN33_VALID
```

```
    FIND MSN33_VALID
```

```
    PUT FLIGHT
```

```
    CLOSE FLIGHT;
```

```
! ***** MISSION CODE 3 LOGIC *****
```

```
! ***** RULE 1 *****
```

```
! mission code 3 is null
```


RULE MISSION_CODE3_VALUE_RULE1

IF

FIELD_TO_UPDATE = MISSION_CODE_3 AND
MISSION_CODE3_RULE = USED AND
SKIP_AGAIN = YES

THEN

MISSION_3_VALUE = MISSING
GET DOCNUM_UPDATE = DOCNUM, FLIGHT, ALL
RESET MSN3_2

! all related flight attributes are null

MSN3_2 = (BLANK)
RESET MSN3_3
MSN3_3 = (BLANK)
RESET HRS3
HRS3 = (BLANK)
RESET MSN3_1
PUT FLIGHT
CLOSE FLIGHT

! loop to update ENGINE records

Y = 1
GET DOCNUM_UPDATE = DOCNUM AND ENGNUM = (Y), FLTENG,
ALL
WHILETRUE ENGNUM <> UNKNOWN THEN
 RESET ENGHRS
 FIND ENGHRS
 RESET ENGHRS_VALID
 RESET ENGHRS_LOOP
 FIND ENGHRS_LOOP
 Y = (Y +1)
 PUT FLTENG
 CLS
 GET DOCNUM_UPDATE = DOCNUM AND ENGNUM = (Y),
 FLTENG, ALL
END
CLOSE FLTENG;

! *** MISSION CODE 3 LOGIC *******

! *** RULE 2 *******

! replace current mission code 3

RULE MISSION_CODE3_VALUE_RULE2

IF

FIELD_TO_UPDATE = MISSION_CODE_3 AND
MISSION_CODE3_RULE = USED AND
TOTAL2 <> (HRS1 + HRS2 + HRS3) and
SKIP_AGAIN = NO

THEN

MISSION_3_VALUE = NOT_MISSING
GET DOCNUM_UPDATE = DOCNUM, FLIGHT, ALL
PUT FLIGHT
CLOSE FLIGHT;

```

! ***** MISSION CODE 3 LOGIC *****
! ***** RULE 2 *****
! mission code 3 was previously null

```

```

RULE MISSION_CODE3_VALUE_RULE3

```

```

IF

```

```

    FIELD_TO_UPDATE = MISSION_CODE_3 AND
    MISSION_CODE3_RULE = USED AND
    TOTAL2 = (HRS1 + HRS2 + HRS3) AND
    SKIP = NO

```

```

THEN

```

```

    MISSION_3_VALUE = NOT MISSING
    GET DOCNUM_UPDATE = DOCNUM, FLIGHT, ALL
    CLS

```

```

! find mission 3 hours

```

```

    RESET CHECK
    FIND CHECK
    TEMPHRS1 = 0
    TEMPHRS2 = 0
    TEMPHRS3 = 0
    TOTHR = 72.0
    SUBTOTAL = 0

```

```

! find mission 3 hours

```

```

    RESET HRS3
    FIND HRS3
    RESET TEST_HRS3
    WHILETRUE TEST_HRS3 = UNKNOWN OR TEST_HRS3 = NOT_TRUE
    THEN
        RESET TEST_HRS3
        FIND TEST_HRS3

```

```

    END

```

```

    CLS

```

```

    PUT FLIGHT

```

```

    CLOSE FLIGHT

```

```

! loop to update ENGINE records

```

```

    Y = 1

```

```

    GET DOCNUM_UPDATE = DOCNUM AND ENGNUM = (Y), FLTENG,
    ALL

```

```

    WHILETRUE ENGNUM <> UNKNOWN THEN

```

```

        RESET ENGHRS
        FIND ENGHRS
        RESET ENGHRS_VALID
        RESET ENGHRS_LOOP
        FIND ENGHRS_LOOP
        Y = (Y + 1)
        PUT FLTENG
        CLS
        GET DOCNUM_UPDATE = DOCNUM AND ENGNUM = (Y),
        FLTENG, ALL

```

```

    END

```

```

    CLOSE FLTENG;

```

```

! ***** MISSION CODE 3 LOGIC *****
! ***** RULE 2 *****
! mission code 3 not allowed

```

RULE MISSION_CODE3_VALUE_RULE4

IF

```

    FIELD_TO_UPDATE = MISSION_CODE_3 AND
    MISSION_CODE3_RULE = NOT_USED

```

THEN

```

    MISSION_3_VALUE = NOT_REQUIRED
    CLS;

```

```

! ***** UPDATE MISSION HOURS 3 *****

```

RULE UPDATE_HRS3

IF

```

    FIELD_TO_UPDATE = MISSION_3_HOURS

```

THEN

```

    UPDATE_COMPLETED = YES
    GET DOCNUM_UPDATE = DOCNUM, FLIGHT, ALL

```

```

! display current mission hours 3

```

```

    DISPLAY "{HRS3} IS CURRENTLY THE MISSION 3 HOURS.
"
```

```

    TOTAL1 = (HRS1 + HRS2 + HRS3)

```

```

    TOTAL = (HRS1 + HRS2)

```

```

    CHECKSUM = (HRS1)

```

```

    RESET EXCD_VALUE

```

```

    FIND EXCD_VALUE

```

```

! find if mission hours 3 is valid

```

```

    RESET UPDATE_HRS3_VALID

```

```

    FIND UPDATE_HRS3_VALID

```

```

    PUT FLIGHT

```

```

    CLOSE FLIGHT

```

```

! loop to update ENGINE records

```

```

    Y = 1

```

```

    GET DOCNUM_UPDATE = DOCNUM AND ENGNUM = (Y), FLTENG,
    ALL

```

```

    WHILETRUE ENGNUM <> UNKNOWN AND UPDATE_HRS3_VALID <>
    FALSE THEN

```

```

        RESET ENGHRS

```

```

        FIND ENGHRS

```

```

        RESET ENGHRS_VALID

```

```

        RESET ENGHRS_LOOP

```

```

        FIND ENGHRS_LOOP

```

```

        Y = (Y + 1)

```

```

        PUT FLTENG

```

```

        CLS

```

```

        GET DOCNUM_UPDATE = DOCNUM AND ENGNUM = (Y),
        FLTENG, ALL

```

```

    END

```

```

    CLOSE FLTENG

```

```

FIELD_TO_UPDATE = DONE;

! ***** UPDATE TOTAL FLIGHTS *****

RULE UPDATE_TOTAL_FLIGHTS
IF
    FIELD_TO_UPDATE = TOTAL_FLIGHTS
THEN
    UPDATE_COMPLETED = YES
! display current total flight
    DISPLAY "{TOTFLT} IS CURRENTLY THE TOTAL FLIGHTS.
    "
    CLOSE FLIGHT
! find if total flight is valid
    RESET UPDATE_TOTFLT_VALID
    FIND UPDATE_TOTFLT_VALID
    CLS
    FIELD_TO_UPDATE = DONE;

! ***** UPDATE SHIP/FIELD OPERATIONS *****

RULE UPDATE_SHIP_FIELD_OPERATIONS_CODE
IF
    FIELD_TO_UPDATE = SHIP_FIELD_OPERATIONS_CODE
THEN
    UPDATE_COMPLETED = YES
! display current ship/field operations code
    DISPLAY "{OPS} IS CURRENTLY THE SHIP/FIELD OPERATIONS
CODE.
    "
    CLOSE FLIGHT
! find if ship/field operations code is valid
    RESET UPDATE_OPS_VALID
    FIND UPDATE_OPS_VALID
    CLS
    FIELD_TO_UPDATE = DONE;

! ***** UPDATE CATAPULT/JATO LAUNCHES *****

RULE UPDATE_CATAPULT_JATO_LAUNCHES
IF
    FIELD_TO_UPDATE = CATAPULT_JATO_LAUNCHES
THEN
    UPDATE_COMPLETED = YES
! display current catapult/jato launches
    DISPLAY "{CJ} IS CURRENTLY THE NUMBER OF CATAPULT/JATO
LAUNCHES.
    "
    CLOSE FLIGHT
! find catapult/jato launches as necessary
    GET ALL, ORGAN, CATSJATO
! find if cj is valid

```

```
RESET UPDATE_CJ_VALID
FIND UPDATE_CJ_VALID
CLOSE ORGAN
CLS
FIELD_TO_UPDATE = DONE;
```

! *** UPDATE AIRLIFT MISSION NUMBER *******

```
RULE UPDATE_AIRLIFT_MISSION_NUMBER
IF
    FIELD_TO_UPDATE = AIRLIFT_MISSION_NUMBER
THEN
    UPDATE_COMPLETED = YES
! display current airlift mission number
    DISPLAY "{MISNUM} IS CURRENTLY THE AIRLIFT MISSION
NUMBER.
"
    CLOSE FLIGHT
! find airlift mission number as necessary
    GET ALL, ORGAN, AIRLIFT
! find if airlift mission number is valid
    RESET UPDATE_AIRLIFT_VALID
    FIND UPDATE_AIRLIFT_VALID
    CLOSE ORGAN
    CLS
    FIELD_TO_UPDATE = DONE;
```

! *** UPDATE NUMBER OF HOISTS *******

```
RULE UPDATE_NUMBER_OF_HOISTS
IF
    FIELD_TO_UPDATE = NUMBER_OF_HOISTS
THEN
    UPDATE_COMPLETED = YES
! display current number of hoists
    DISPLAY "{NUMHOISTS} IS CURRENTLY THE NUMBER OF HOISTS.
"
    CLOSE FLIGHT
! find if number of hoists is valid
    RESET UPDATE_NUMHOISTS_VALID
    FIND UPDATE_NUMHOISTS_VALID
    CLS
    FIELD_TO_UPDATE = DONE;
```

! *** UPDATE ENGINE HOURS *******

```
RULE UPDATE_ENGINE_HOURS
IF
    FIELD_TO_UPDATE = ENGINE_HOURS
THEN
    UPDATE_COMPLETED = YES
```



```

! find if engine hours valid
  RESET UPDATE_ENGINE_HOURS_VALID
  FIND UPDATE_ENGINE_HOURS_VALID
  CLS
  FIELD_TO_UPDATE = DONE;

! ***** UPDATE DONE *****

RULE DONE
IF
  FIELD_TO_UPDATE = DONE
THEN
  UPDATE_COMPLETED = YES;

! *****DELETE OPERATION*****

RULE DELETE_DOCUMENT
IF
  WHICHTASK = DELETE_RECORD
THEN
  TASKCOMPLETED = YES
  MENU DOCNUM_DELETE, ALL, FLIGHT, DOCNUM
! ask user for document number from menu of document numbers
  FIND DOCNUM_DELETE
  MRESET DOCNUM_DELETE
! ask user to confirm delete operation
  RESET CONTINUE
  FIND CONTINUE
! find if any documents to delete
  RESET DELETE
  FIND DELETE;

! determine if there are any flight records to delete

RULE DELETE
IF
  DOCNUM_DELETE = NONE OR
  CONTINUE = NO AND
  DELETE = UNKNOWN
THEN
! no records to delete or user has changed mind
! display message
  DELETE = NO
  DISPLAY "          NO FLIGHT RECORD DELETED.

                          PRESS ANY KEY TO CONTINUE
                          ~"
  CLS
ELSE
! records available to delete
! and user has confirmed deletion

```



```

DELETE = YES
GET DOCNUM_DELETE = DOCNUM, FLIGHT, ALL
! all attributes are set to null
DOCNUM = (BLANK)
EXCD = (BLANK)
MSN1_1 = (BLANK)
MSN1_2 = (BLANK)
MSN1_3 = (BLANK)
HRS1 = (BLANK)
MSN2_1 = (BLANK)
MSN2_2 = (BLANK)
MSN2_3 = (BLANK)
HRS2 = (BLANK)
MSN3_1 = (BLANK)
MSN3_2 = (BLANK)
MSN3_3 = (BLANK)
HRS3 = (BLANK)
TOTFLT = (BLANK)
OPS = (BLANK)
CJ = (BLANK)
MISNUM = (BLANK)
NUMHOISTS = (BLANK)
REMARKS = (BLANK)
SIDENUM = (BLANK)
PUT FLIGHT
CLOSE FLIGHT
! Cascade delete feature
! all associated records in with FLIGHT set to null
GET DOCNUM_DELETE = DOCNUM, FLTENG, ALL
WHILETRUE ENGNUM <> UNKNOWN THEN
    DOCNUM = (BLANK)
    ENGNUM = (BLANK)
    ENGHRS = (BLANK)
    PUT FLTENG
    GET DOCNUM_DELETE = DOCNUM, FLTENG, ALL
END
CLOSE FLTENG;

```

! *** VIEW OPERATION *******

```

RULE VIEW_DOCUMENT
IF
    WHICHTASK = DISPLAY_RECORD
THEN
    RESET ALL
    WHICHTASK = DISPLAY_RECORD
    FORMAT HRS1, 4.1
    FORMAT HRS2, 4.1
    FORMAT HRS3, 4.1
    FORMAT ENGHRS, 4.1
    TASKCOMPLETED = YES

```

```

    RESET DOCNUM VIEW
    MENU DOCNUM VIEW, ALL, FLIGHT, DOCNUM
! ask user for document number
    FIND DOCNUM VIEW
    MRESET DOCNUM VIEW
! find if any flight records to view
    RESET VIEW
    FIND VIEW;

! determine if there are any documents to view

RULE VIEW
IF
    DOCNUM_VIEW = NONE AND
    VIEW = UNKNOWN
THEN
! no flight records to view
    VIEW = NO
    DISPLAY " THERE IS NO FLIGHT RECORD TO VIEW.

                                PRESS ANY KEY TO CONTINUE
                                ~"

    CLS
ELSE
! flight record available to view
    VIEW = YES
    GET DOCNUM VIEW = DOCNUM, FLIGHT, ALL
    SIDENO = (SIDENUM)
    CLOSE FLIGHT
    GET SIDENO = SIDE, AIRCRAFT, ALL
    CLOSE AIRCRAFT
    GET ALL, ORGAN, ALL
    CLOSE ORGAN
    CLS
! format for display
    DISPLAY "                                NAVAL AIRCRAFT FLIGHT RECORD

NO. {DOCNUM}
AIRCRAFT DATA
    {3SIDENUM} {1EXCD} {6BUNO} {4TEC} {3ORG}
    {1MSN1_1}{1MSN1_2}{1MSN1_3} {4HRS1}
    {1MSN2_1}{1MSN2_2}{1MSN2_3} {4HRS2}
    {1MSN3_1}{1MSN3_2}{1MSN3_3} {4HRS3} {2SUPTCD} {2TOTFLT}
    {1OPS} {2CJ} SIDE E BUÑO/SER TEC ORG MSN1 HRS1 MSN2
HRS2 MSN3 HRS3 SUPT TOT O CAT/ NO. X
    TOTAL MISSION REQ DATA CODE FLT P JATO C
S

D

    {9MISNUM} {2NUMHOISTS}
AIRLIFT MISSION NO. NO.

```

HOISTS

"

```
GET DOCNUM_VIEW = DOCNUM, FLTENG, ALL
WHILEKNOWN ENGNUM
    DISPLAY " ENGINE NO{ENGNUM} ENGINE HOURS
    {4ENGHRS}"
    GET DOCNUM_VIEW = DOCNUM, FLTENG, ALL
END
DISPLAY "
```

PRESS ANY KEY TO CONTINUE....~"

```
CLOSE FLTENG
CLS;
```

! *** EXIT OPERATION *******

```
RULE EXIT
IF
    WHICHTASK = EXIT
THEN
    TASKCOMPLETED = YES;
```

**! rule to determine if exception code within record is
! null and assign value BLANK to it**

```
RULE EXCEPTION_CODE_VALUE
IF
    WHICHTASK = UPDATE_RECORD AND
    EXCD = UNKNOWN
THEN
    EXCD_VALUE = NEEDED
    RESET EXCD
    EXCD = (BLANK)
ELSE
    EXCD_VALUE = NOT_NEEDED;
```

**! rule to check value of exception code is equal to X
! and mission code 1 position 1 is equal to 6**

```
RULE CHECK_VALUE
IF
    MSN1_1 = 6 OR
    EXCD = X
THEN
    CHECK = YES
ELSE
    CHECK = NO;
```

**! rules to determine if repeating attributes
! (mission code n, n+1,...) should be skipped**

RULE TEST_UNKNOWN1

IF

MSN2_1 = UNKNOWN OR

MSN2_1 = (BLANK)

THEN

SKIP = YES

SKIP_AGAIN = YES

ELSE

SKIP = NO;

RULE TEST_UNKNOWN2

IF

MSN3_1 = UNKNOWN OR

MSN3_1 = (BLANK)

THEN

SKIP_AGAIN = YES

ELSE

SKIP_AGAIN = NO;

!*** KNOWLEDGE BASE LIBRARY *******

!*** DOMAIN INTEGRITY CONSTRAINTS *******

! THESE CONSTRAINTS ARE DEFINED IN DATA TYPES

!*** COLUMN INTEGRITY CONSTRAINTS *******

RULE EXCEPTION_CODE_VALID

IF

EXCD_VALID = UNKNOWN

THEN

WHILETRUE EXCD_VALID = UNKNOWN THEN

RESET TEST_EXCD

FIND TEST_EXCD

END

EXCD_VALID = TRUE;

RULE COLUMN_INTEGRITY_EXCEPTION_CODE

IF

EXCD = C OR

EXCD = D OR

EXCD = X OR

EXCD = UNKNOWN OR

EXCD = (BLANK) AND

EXCD_VALID = UNKNOWN

THEN

TEST_EXCD = YES

EXCD_VALID = TRUE

ELSE

TEST_EXCD = YES

DISPLAY " YOU NEED TO ENTER A VALID EXCEPTION CODE TO

CONTINUE."
RESET EXCD
FIND EXCD;

RULE UPDATE_EXCEPTION_CODE_VALID
IF

FIELD_TO_UPDATE = EXCEPTION_CODE AND
UPDATE_EXCD_VALID = UNKNOWN

THEN

WHILETRUE UPDATE_EXCD_VALID = UNKNOWN THEN
 RESET TEST_UPDATE_EXCD
 FIND TEST_UPDATE_EXCD
END
UPDATE_EXCD_VALID = TRUE;

RULE COLUMN_INTEGRITY_UPDATE_EXCEPTION_CODE
IF

EXCD_NEW = C OR
EXCD_NEW = D OR
EXCD_NEW = X OR
EXCD_NEW = (BLANK) AND
FIELD_TO_UPDATE = EXCEPTION_CODE

THEN

TEST_UPDATE_EXCD = YES
UPDATE_EXCD_VALID = TRUE

ELSE

TEST_UPDATE_EXCD = YES
DISPLAY " YOU NEED TO ENTER A VALID EXCEPTION CODE TO
CONTINUE."
RESET EXCD_NEW
FIND EXCD_NEW;

RULE MISSION_1_POSITION_1
IF

MSN11_VALID = UNKNOWN

THEN

WHILETRUE MSN11_VALID = UNKNOWN THEN
 RESET TEST_MSN11
 FIND TEST_MSN11
END
MSN11_VALID = TRUE;

RULE COLUMN_INTEGRITY_MISSION11_CODE
IF

MSN1_1 >= 1 AND
MSN1_1 <= 6

THEN

TEST_MSN11 = YES
MSN11_VALID = TRUE

ELSE

TEST_MSN11 = YES

```

    DISPLAY " YOU MUST ENTER A NUMBER FROM 1 TO 6."
    RESET MSN1_1
    FIND MSN1_1;

RULE MISSION_1_POSITION_3
IF
    MSN13_VALID = UNKNOWN
THEN
    WHILETRUE MSN13_VALID = UNKNOWN THEN
        RESET TEST_MSN13
        FIND TEST_MSN13
    END
    MSN13_VALID = TRUE
    DISPLAY "{MSN1_1}{MSN1_2}{MSN1_3}
        PRESS ANY KEY TO CONTINUE~";

RULE TEST_MISSION13_CODE_VALID
IF
    MSN1_3 >= 0 AND
    MSN1_3 <= 9
THEN
    TEST_MSN13 = YES
    MSN13_VALID = TRUE
ELSE
    TEST_MSN13 = YES
    DISPLAY " YOU MUST ENTER A NUMBER FROM 0 TO 9."
    RESET MSN1_3
    FIND MSN1_3;

RULE HRS_1_VALID
IF
    EXCD = X
THEN
    HRS1_VALID = NOT_NEEDED
ELSE
    RESET HRS1
    FIND HRS1
    WHILETRUE HRS1_VALID = UNKNOWN THEN
        RESET TEST_HRS1
        FIND TEST_HRS1
    END
    HRS1_VALID = TRUE;

RULE UPDATE_HRS_1_VALID
IF
    FIELD_TO_UPDATE = MISSION_1_HOURS AND
    EXCD = X
THEN
    DISPLAY " YOU ARE NOT ABLE TO ENTER HOURS FOR MISSION 1
        BECAUSE THE EXCEPTION CODE IS CURRENTLY {EXCD}
        "

```



```

UPDATE_HRS1_VALID = FALSE
ELSE
    SUBTOTAL_HOURS = ((HRS2) + (HRS3))
    ALLOWED_HOURS = (72 - (SUBTOTAL_HOURS))
    RESET_HRS1
    FIND_HRS1
    WHILETRUE UPDATE_HRS1_VALID = UNKNOWN THEN
        RESET_UPDATE_TEST_HRS1
        FIND_UPDATE_TEST_HRS1
    END
    UPDATE_HRS1_VALID = TRUE;

RULE UPDATE_HRS_2_VALID
IF
    FIELD_TO_UPDATE = MISSION_2_HOURS AND
    CHECK = YES OR
    TOTAL = (CHECKSUM)
THEN
    DISPLAY "YOU ARE NOT ABLE TO ENTER HOURS FOR MISSION 2
            BECAUSE:
            1. THE EXCEPTION CODE IS CURRENTLY X
            2. THE MISSION 1 CODE BEGINS WITH A 6
            3. THE MISSION 2 CODE IS MISSING
            "
    UPDATE_HRS2_VALID = FALSE
ELSE
    SUBTOTAL_HOURS = ((HRS1) + (HRS3))
    ALLOWED_HOURS = (72 - (SUBTOTAL_HOURS))
    RESET_HRS2
    FIND_HRS2
    WHILETRUE UPDATE_HRS2_VALID = UNKNOWN THEN
        RESET_UPDATE_TEST_HRS2
        FIND_UPDATE_TEST_HRS2
    END
    UPDATE_HRS2_VALID = TRUE;

RULE UPDATE_HRS_3_VALID
IF
    FIELD_TO_UPDATE = MISSION_3_HOURS AND
    CHECK = YES OR
    TOTAL = (CHECKSUM) OR
    TOTAL = (TOTAL1)
THEN
    DISPLAY "YOU ARE NOT ABLE TO ENTER HOURS FOR MISSION 3
            BECAUSE:
            1. THE EXCEPTION CODE IS CURRENTLY X
            2. THE MISSION 1 CODE BEGINS WITH A 6
            3. THE MISSION 2 CODE IS MISSING
            4. THE MISSION 3 CODE IS MISSING
            "
    UPDATE_HRS3_VALID = FALSE

```

```

ELSE
    SUBTOTAL_HOURS = ((HRS1) + (HRS2))
    ALLOWED_HOURS = (72 - (SUBTOTAL_HOURS))
    RESET HRS3
    FIND HRS3
    WHILETRUE UPDATE_HRS3_VALID = UNKNOWN THEN
        RESET UPDATE_TEST_HRS3
        FIND UPDATE_TEST_HRS3
    END
    UPDATE_HRS3_VALID = TRUE;

RULE COLUMN_INTEGRITY_UPDATE_HRS1
IF
    FIELD_TO_UPDATE = MISSION_1_HOURS AND
    HRS1 > 0.0 AND
    HRS1 <= (ALLOWED_HOURS)
THEN
    UPDATE_TEST_HRS1 = YES
    UPDATE_HRS1_VALID = TRUE
    TOTAL = ((HRS1) + (SUBTOTAL_HOURS))
ELSE
    UPDATE_TEST_HRS1 = YES
    DISPLAY " YOU MUST ENTER A NUMBER FROM 00.1 TO
    {ALLOWED_HOURS}"
    RESET HRS1
    FIND HRS1;

RULE COLUMN_INTEGRITY_UPDATE_HRS2
IF
    FIELD_TO_UPDATE = MISSION_2_HOURS AND
    HRS2 > 0.0 AND
    HRS2 <= (ALLOWED_HOURS)
THEN
    UPDATE_TEST_HRS2 = YES
    UPDATE_HRS2_VALID = TRUE
    TOTAL = ((HRS2) + (SUBTOTAL_HOURS))
ELSE
    UPDATE_TEST_HRS2 = YES
    DISPLAY " YOU MUST ENTER A NUMBER FROM 00.1 TO
    {ALLOWED_HOURS}"
    RESET HRS2
    FIND HRS2;

RULE COLUMN_INTEGRITY_UPDATE_HRS3
IF
    FIELD_TO_UPDATE = MISSION_3_HOURS AND
    HRS3 > 0.0 AND
    HRS3 <= (ALLOWED_HOURS)
THEN
    UPDATE_TEST_HRS3 = YES
    UPDATE_HRS3_VALID = TRUE

```

```

TOTAL = ((HRS3) + (SUBTOTAL_HOURS))
ELSE
  UPDATE TEST_HRS3 = YES
  DISPLAY " YOU MUST ENTER A NUMBER FROM 00.1 TO
  {ALLOWED_HOURS}"
  RESET HRS3
  FIND HRS3;

RULE COLUMN_INTEGRITY_HRS1
IF
  HRS1 > 0.0 AND
  HRS1 <= 72.0
THEN
  TEST_HRS1 = YES
  HRS1_VALID = TRUE
  TOTAL = (HRS1)
ELSE
  TEST_HRS1 = YES
  DISPLAY " YOU MUST ENTER A NUMBER FROM 00.1 TO 72.0"
  RESET HRS1
  FIND HRS1;

RULE MISSION_2_POSITION_1
IF
  CHECK = YES
THEN
  MSN21_VALID = NOT_NEEDED
  SKIP = YES
  SKIP_AGAIN = YES
ELSE
  RESET MSN2_1
  FIND MSN2_1
  RESET SKIP
  FIND SKIP
  WHILETRUE MSN21_VALID = UNKNOWN THEN
    RESET TEST_MSN21
    FIND TEST_MSN21
  END
  MSN21_VALID = TRUE;

RULE COLUMN_INTEGRITY_MISSION21
IF
  MSN2_1 >= 1 OR
  MSN2_1 = UNKNOWN OR
  MSN2_1 = (BLANK) AND
  MSN2_1 <= 5 OR
  MSN2_1 = UNKNOWN OR
  MSN2_1 = (BLANK)
THEN
  TEST_MSN21 = YES
  MSN21_VALID = TRUE

```

```

ELSE
    TEST_MSN21 = YES
    DISPLAY " YOU MUST ENTER A NUMBER FROM 1 TO 5."
    RESET MSN2_1
    FIND MSN2_1;

RULE MISSION_2_POSITION_2
IF
    CHECK = YES OR
    SKIP = YES
THEN
    MSN22_VALID = NOT_NEEDED;

RULE TEST_MISSION23_CODE_VALID
IF
    CHECK = YES OR
    SKIP = YES
THEN
    MSN23_VALID = NOT_NEEDED
ELSE
    RESET MSN2_3
    FIND MSN2_3
    WHILETRUE MSN23_VALID = UNKNOWN THEN
        RESET TEST_MSN23
        FIND TEST_MSN23
    END
    MSN23_VALID = TRUE
    DISPLAY "{MSN2_1}{MSN2_2}{MSN2_3}
        PRESS ANY KEY TO CONTINUE~";

RULE TEST_MISSION23_CODE_VALID
IF
    MSN2_3 >= 0 AND
    MSN2_3 <= 9
THEN
    TEST_MSN23 = YES
    MSN23_VALID = TRUE
ELSE
    TEST_MSN23 = YES
    DISPLAY " YOU MUST ENTER A NUMBER FROM 0 TO 9."
    RESET MSN2_3
    FIND MSN2_3;

RULE HRS_2_VALID
IF
    CHECK = YES OR
    SKIP = YES
THEN
    HRS2_VALID = NOT_NEEDED
ELSE
    RESET HRS2

```

```

FIND HRS2
WHILETRUE HRS2_VALID = UNKNOWN THEN
    RESET TEST_HRS2
    FIND TEST_HRS2
END
HRS2_VALID = TRUE;

```

RULE COLUMN_INTEGRITY_HRS2

```

IF
    HRS2 > 0.0 AND
    HRS2 <= 72.0 AND
    TOTHRs >= (HRS1 + HRS2 + TEMPHRs3)
THEN
    TEST_HRS2 = YES
    HRS2_VALID = TRUE
    TOTAL = ((TOTAL) + (HRS2))
ELSE
    TEST_HRS2 = YES
    SUBTOTAL = (TOTHRs - HRS1)
    DISPLAY " YOU MUST ENTER A NUMBER FROM 00.1 TO
    {SUBTOTAL}"
    RESET HRS2
    FIND HRS2;

```

RULE MISSION_3_POSITION_1

```

IF
    CHECK = YES OR
    SKIP = YES
THEN
    MSN31_VALID = NOT_NEEDED
ELSE
    RESET MSN3_1
    FIND MSN3_1
    RESET SKIP_AGAIN
    FIND SKIP_AGAIN
    WHILETRUE MSN31_VALID = UNKNOWN THEN
        RESET TEST_MSN31
        FIND TEST_MSN31
    END
    MSN31_VALID = TRUE;

```

RULE COLUMN_INTEGRITY_MISSION31

```

IF
    MSN3_1 >= 1 OR
    MSN3_1 = UNKNOWN OR
    MSN3_1 = (BLANK) AND
    MSN3_1 <= 5 OR
    MSN3_1 = UNKNOWN OR
    MSN3_1 = (BLANK)
THEN
    TEST_MSN31 = YES

```

```

        MSN31_VALID = TRUE
ELSE
    TEST_MSN31 = YES
    DISPLAY " YOU MUST ENTER A NUMBER FROM 1 TO 5."
    RESET MSN3_1
    FIND MSN3_1;

RULE MISSION_3_POSITION_2
IF
    CHECK = YES OR
    SKIP = YES OR
    SKIP_AGAIN = YES
THEN
    MSN32_VALID = NOT_NEEDED;

RULE TEST_MISSION33_CODE_VALID
IF
    CHECK = YES OR
    SKIP = YES OR
    SKIP_AGAIN = YES
THEN
    MSN33_VALID = NOT_NEEDED
ELSE
    RESET MSN3_3
    FIND MSN3_3
    WHILETRUE MSN33_VALID = UNKNOWN THEN
        RESET TEST_MSN33
        FIND TEST_MSN33
    END
    MSN33_VALID = TRUE
    DISPLAY "{MSN3_1}{MSN3_2}{MSN3_3}
        PRESS ANY KEY TO CONTINUE~";

RULE TEST_MISSION33_CODE_VALID
IF
    MSN3_3 >= 0 AND
    MSN3_3 <= 9
THEN
    TEST_MSN33 = YES
    MSN33_VALID = TRUE
ELSE
    TEST_MSN33 = YES
    DISPLAY " YOU MUST ENTER A NUMBER FROM 0 TO 9."
    RESET MSN3_3
    FIND MSN3_3;

RULE HRS_3_VALID
IF
    CHECK = YES OR
    SKIP = YES OR
    SKIP_AGAIN = YES

```



```

THEN
    HRS3_VALID = NOT_NEEDED
ELSE
    RESET HRS3
    FIND HRS3
    WHILETRUE HRS3_VALID = UNKNOWN THEN
        RESET TEST_HRS3
        FIND TEST_HRS3
    END
    HRS3_VALID = TRUE;

RULE COLUMN_INTEGRITY_HRS3
IF
    HRS3 > 0.0 AND
    HRS3 <= 72.0 AND
    TOTHR3 >= (HRS1 + HRS2 + HRS3)
THEN
    TEST_HRS3 = YES
    HRS3_VALID = TRUE
    TOTAL = ((TOTAL) + (HRS3))
ELSE
    TEST_HRS3 = YES
    SUBTOTAL = (TOTHR3 - (HRS1 + HRS2))
    DISPLAY " YOU MUST ENTER A NUMBER FROM 00.1 TO
    {SUBTOTAL}"
    RESET HRS3
    FIND HRS3;

RULE TOTAL_FLIGHTS_VALID
IF
    EXCD = X
THEN
    TOTFLT_VALID = NOT_NEEDED
ELSE
    RESET TOTFLT
    FIND TOTFLT
    WHILETRUE TOTFLT_VALID = UNKNOWN THEN
        RESET TEST_TOTFLT
        FIND TEST_TOTFLT
    END
    TOTFLT_VALID = TRUE;

RULE UPDATE_TOTAL_FLIGHTS_VALID
IF
    EXCD = X AND
    FIELD_TO_UPDATE = TOTAL_FLIGHTS
THEN
    UPDATE_TOTFLT_VALID = NOT_NEEDED
    DISPLAY " YOU ARE NOT ABLE TO ENTER TOTAL FLIGHTS FOR
    {DOCNUM_UPDATE} BECAUSE THE EXCEPTION CODE IS CURRENTLY
    {EXCD}

```

PRESS ANY KEY TO CONTINUE~"

```
CLS
ELSE
  GET DOCNUM_UPDATE = DOCNUM, FLIGHT, TOTFLT
  RESET TOTFLT
  FIND TOTFLT
  WHILETRUE UPDATE_TOTFLT_VALID = UNKNOWN THEN
    RESET TEST_TOTFLT
    FIND TEST_TOTFLT
  END
  PUT FLIGHT
  CLOSE FLIGHT
  UPDATE_TOTFLT_VALID = TRUE;

RULE COLUMN_INTEGRITY_TOTFLT
IF
  TOTFLT >= 1 AND
  TOTFLT <= 99
THEN
  TEST_TOTFLT = YES
  TOTFLT_VALID = TRUE
  UPDATE_TOTFLT_VALID = TRUE
ELSE
  TEST_TOTFLT = YES
  DISPLAY " YOU MUST ENTER A NUMBER FROM 1 TO 99"
  RESET TOTFLT
  FIND TOTFLT;

RULE OPS_CODE_VALID
IF
  EXCD = X
THEN
  OPS_VALID = NOT_NEEDED
ELSE
  WHILETRUE OPS_VALID = UNKNOWN THEN
    RESET TEST_OPS
    FIND TEST_OPS
  END
  OPS_VALID = TRUE;

RULE UPDATE_SHIP_FIELD_OPS_CODE_VALID
IF
  EXCD = X AND
  FIELD_TO_UPDATE = SHIP_FIELD_OPERATIONS_CODE
THEN
  UPDATE_OPS_VALID = NOT_NEEDED
  DISPLAY "YOU ARE NOT ABLE TO ENTER SHIP/FIELD
    OPERATIONS CODE FOR {DOCNUM_UPDATE}
    BECAUSE THE EXCEPTION CODE IS CURRENTLY {EXCD}"
```

PRESS ANY KEY TO CONTINUE~"

```
CLS
ELSE
  GET DOCNUM_UPDATE = DOCNUM, FLIGHT, OPS
  RESET OPS
  FIND OPS
  WHILETRUE UPDATE_OPS_VALID = UNKNOWN THEN
    RESET TEST_OPS
    FIND TEST_OPS
  END
  PUT FLIGHT
  CLOSE FLIGHT
  UPDATE_OPS_VALID = TRUE;

RULE COLUMN_INTEGRITY_OPS_CODE
IF
  OPS = A OR
  OPS = B OR
  OPS = 1 OR
  OPS = 2
THEN
  TEST_OPS = YES
  OPS_VALID = TRUE
  UPDATE_OPS_VALID = TRUE
ELSE
  TEST_OPS = YES
  DISPLAY " YOU NEED TO ENTER AN A, B, 1, OR 2."
  RESET OPS
  FIND OPS;

RULE CATS_JATO_VALID
IF
  CATSJATO = N OR
  EXCD = X
THEN
  CJ_VALID = NOT_NEEDED
ELSE
  RESET CJ
  FIND CJ
  WHILETRUE CJ_VALID = UNKNOWN THEN
    RESET TEST_CJ
    FIND TEST_CJ
  END
  CJ_VALID = TRUE;

RULE UPDATE_CATAPULT_JATO_LAUNCHES_VALID
IF
  CATSJATO = N OR
  EXCD = X AND
  FIELD_TO_UPDATE = CATAPULT_JATO_LAUNCHES
```

```

THEN
    UPDATE_CJ_VALID = NOT_NEEDED
    DISPLAY "YOU ARE NOT ABLE TO ENTER CATAPULT/JATO
            LAUNCHES FOR {DOCNUM_UPDATE} BECAUSE EITHER
    1. YOUR ORGANIZATION DOES NOT DOCUMENT CATAPULT/JATO
      LAUNCHES
    2. THE EXCEPTION CODE IS CURRENTLY X

            PRESS ANY KEY TO CONTINUE~"

    CLS
ELSE
    GET DOCNUM_UPDATE = DOCNUM, FLIGHT, CJ
    RESET CJ
    FIND CJ
    WHILETRUE UPDATE_CJ_VALID = UNKNOWN THEN
        RESET TEST_CJ
        FIND TEST_CJ
    END
    PUT FLIGHT
    CLOSE FLIGHT
    UPDATE_CJ_VALID = TRUE;

RULE COLUMN_INTEGRITY_CJ
IF
    CJ >= 1 OR
    CJ = UNKNOWN OR
    CJ = (BLANK) AND
    CJ <= 99 OR
    CJ = UNKNOWN OR
    CJ = (BLANK)
THEN
    TEST_CJ = YES
    CJ_VALID = TRUE
    UPDATE_CJ_VALID = TRUE
ELSE
    TEST_CJ = YES
    DISPLAY " YOU MUST ENTER A NUMBER FROM 1 TO 99 OR
            <SPACE> FOR NONE"

    RESET CJ
    FIND CJ;

RULE AIRLIFT_MISSION_NUMBER_VALID
IF
    AIRLIFT = N OR
    EXCD = X
THEN
    AIRLIFT_VALID = NOT_NEEDED
ELSE
    RESET MISNUM
    FIND MISNUM
    AIRLIFT_VALID = TRUE;

```

```

RULE UPDATE_AIRLIFT_MISSION_NUMBER_VALID
IF
    AIRLIFT = N OR
    EXCD = X AND
    FIELD_TO_UPDATE = AIRLIFT_MISSION_NUMBER
THEN
    UPDATE_AIRLIFT_VALID = NOT_NEEDED
    DISPLAY "YOU ARE NOT ABLE TO ENTER AIRLIFT MISSION
        NUMBERS FOR {DOCNUM_UPDATE} BECAUSE EITHER
        1. YOUR ORGANIZATION DOES NOT DOCUMENT AIRLIFT
        MISSION NUMBERS
        2. THE EXCEPTION CODE IS CURRENTLY X

        PRESS ANY KEY TO CONTINUE~"
    CLS
ELSE
    GET DOCNUM_UPDATE = DOCNUM, FLIGHT, MISNUM
    RESET MISNUM
    FIND MISNUM
    PUT FLIGHT
    CLOSE FLIGHT
    UPDATE_AIRLIFT_VALID = TRUE;

RULE NUMHOIST_VALID
IF
    NUMHOIST_VALID = UNKNOWN AND
    EXCD = X
THEN
    NUMHOIST_VALID = NOT_NEEDED
ELSE
    WHILETRUE NUMHOIST_VALID = UNKNOWN THEN
        RESET TEST_NUMHOIST
        FIND TEST_NUMHOIST
    END
    NUMHOIST_VALID = TRUE;

RULE UPDATE_NUMHOISTS_VALID
IF
    EXCD = X AND
    FIELD_TO_UPDATE = NUMBER_OF_HOISTS
THEN
    UPDATE_NUMHOISTS_VALID = NOT_NEEDED
    DISPLAY "YOU ARE NOT ABLE TO ENTER NUMBER OF HOISTS FOR
        {DOCNUM_UPDATE} BECAUSE THE EXCEPTION CODE IS
        CURRENTLY {EXCD}

        PRESS ANY KEY TO CONTINUE~"
    CLS
ELSE
    GET DOCNUM_UPDATE = DOCNUM, FLIGHT, NUMHOISTS
    RESET NUMHOISTS

```

```

FIND NUMHOISTS
WHILETRUE UPDATE_NUMHOISTS_VALID = UNKNOWN THEN
    RESET TEST_NUMHOIST
    FIND TEST_NUMHOIST
END
PUT FLIGHT
CLOSE FLIGHT
UPDATE_NUMHOISTS_VALID = TRUE;

```

RULE COLUMN_INTEGRITY_NUMHOIST

IF

```

NUMHOISTS >= 1 OR
NUMHOISTS = UNKNOWN OR
NUMHOISTS = (BLANK) AND
NUMHOISTS <= 99 OR
NUMHOISTS = UNKNOWN OR
NUMHOISTS = (BLANK)

```

THEN

```

TEST_NUMHOIST = YES
NUMHOIST_VALID = TRUE
UPDATE_NUMHOISTS_VALID = TRUE

```

ELSE

```

TEST_NUMHOIST = YES
DISPLAY " YOU NEED TO ENTER A NUMBER FROM 1 TO 99, OR ?
FOR NONE."
RESET NUMHOISTS
FIND NUMHOISTS;

```

RULE UPDATE_ENGINE_HOURS_VALID

IF

```

EXCD = X AND
FIELD_TO_UPDATE = ENGINE_HOURS

```

THEN

```

UPDATE_ENGINE_HOURS_VALID = NOT_NEEDED
DISPLAY " YOU ARE NOT ABLE TO ENTER ENGINE HOURS FOR
{DOCNUM_UPDATE} BECAUSE THE EXCEPTION CODE IS
CURRENTLY {EXCD}

```

PRESS ANY KEY TO CONTINUE~"

CLS

ELSE

```

UPDATE_ENGINE_HOURS_VALID = NEEDED
GET DOCNUM_UPDATE = DOCNUM, FLIGHT, ALL
TOTAL = (HRS1 + HRS2 + HRS3)
CLOSE FLIGHT
RESET ENGINE_NUMBER
MENU ENGINE_NUMBER, DOCNUM_UPDATE = DOCNUM, FLTENG,
ENGNUM
FIND ENGINE_NUMBER
MRESET ENGINE_NUMBER

```



```

CLOSE FLTENG
GET DOCNUM_UPDATE = DOCNUM AND ENGINE_NUMBER = ENGNUM,
FLTENG, ENGHRS
RESET UPDATE_ENGHRS
FIND UPDATE_ENGHRS
ENGHRS = (UPDATE_ENGHRS)
RESET ENGHRS_VALID
RESET ENGHRS_LOOP
FIND ENGHRS_LOOP
PUT FLTENG
CLS
CLOSE FLTENG
FIELD_TO_UPDATE = DONE;

```

RULE COLUMN_INTEGRITY_ENGINE_HOURS

IF

```

ENGHRS > 0 AND
ENGHRS <= (TOTAL)

```

THEN

```

TEST_ENGHRS = YES
ENGHRS_VALID = TRUE

```

ELSE

```

TEST_ENGHRS = YES
DISPLAY " YOU MUST ENTER ENGINE HOURS BETWEEN 00.1 AND
{4TOTAL}."
RESET ENGHRS
FIND ENGHRS;

```

!*** ENTITY CONSTRAINT RULES *******

RULE ENTITY_INTEGRITY_DOCNUM_MISSING

IF

```

DOCNUM_NEW = UNKNOWN OR
DOCNUM_NEW = (BLANK)

```

THEN

! loop to get user to enter a document number

```

WHILETRUE DOCNUM_NEW = UNKNOWN OR DOCNUM_NEW = (BLANK)
THEN
    DISPLAY " YOU WILL NOT BE ABLE TO PROCEED UNLESS
    YOU ENTER A DOCUMENT NUMBER."
    RESET DOCNUM_NEW
    FIND DOCNUM_NEW

```

END

```

DOCNUM_NOT_MISSING = TRUE

```

ELSE

```

DOCNUM_NOT_MISSING = TRUE;

```

RULE ENTITY_INTEGRITY_DOCNUM_DUPLICATE

IF

```

DOCNUM_NEW <> UNKNOWN OR
DOCNUM_NEW <> (BLANK)

```

```

THEN
    GET DOCNUM_NEW = DOCNUM, FLIGHT, DOCNUM
    WHILETRUE DOCNUM = (DOCNUM_NEW) THEN
        CLOSE FLIGHT
        DISPLAY " THERE IS ALREADY A DOCUMENT NUMBER
        {DOCNUM_NEW} THAT EXISTS WITHIN THE DATABASE."
        RESET DOCNUM_NEW
    ! get another document_number
        FIND DOCNUM_NEW
        RESET DOCNUM_NOT_MISSING
    ! once again must verify that document number is not a null
    ! value
        FIND DOCNUM_NOT_MISSING
        GET DOCNUM_NEW = DOCNUM, FLIGHT, DOCNUM
    END
    DOCNUM_DUPLICATE = FALSE;

RULE ENTITY_INTEGRITY_UPDATE_SIDENUM_MISSING
IF
    FIELD_TO_UPDATE = SIDE_NUMBER AND
    SIDENUM_UPDATE = UNKNOWN OR
    SIDENUM_UPDATE = (BLANK)
THEN
    ! loop to get user to enter a aircraft side number
    WHILETRUE SIDENUM_UPDATE = UNKNOWN OR SIDENUM_UPDATE =
    (BLANK) THEN
        DISPLAY " YOU WILL NOT BE ABLE TO PROCEED UNLESS
        YOU ENTER A AIRCRAFT SIDE NUMBER."
        RESET SIDENUM_UPDATE
        FIND SIDENUM_UPDATE
    END
    SIDENUM_UPDATE_NOT_MISSING = TRUE
ELSE
    SIDENUM_UPDATE_NOT_MISSING = TRUE;

RULE ENTITY_CONSTRAINT_SIDENUM_MISSING
IF WHICHTASK = APPEND_RECORD AND
    SIDENUM_NEW = UNKNOWN OR
    SIDENUM_NEW = (BLANK)
THEN
    ! loop to get user to enter a aircraft side number
    WHILETRUE SIDENUM_NEW = UNKNOWN OR SIDENUM_NEW =
    (BLANK) THEN
        DISPLAY " YOU WILL NOT BE ABLE TO PROCEED UNLESS
        YOU ENTER A AIRCRAFT SIDE NUMBER."
        RESET SIDENUM_NEW
        FIND SIDENUM_NEW
    END
    SIDENUM_NOT_MISSING = TRUE
ELSE
    SIDENUM_NOT_MISSING = TRUE;

```

!*** REFERENTIAL CONSTRAINT RULES *******

RULE REFERENTIAL_INTEGRITY_SIDENUM_EXISTS

```
IF
    WHICHTASK = APPEND_RECORD AND
    SIDENUM_NEW <> UNKNOWN OR
    SIDENUM_NEW <> (BLANK)
THEN
    GET SIDENUM_NEW = SIDE, AIRCRAFT, SIDE
    ! loop till side number matches an aircraft in organization
    WHILETRUE SIDE = UNKNOWN THEN
        CLOSE AIRCRAFT
        DISPLAY " NO AIRCRAFT EXISTS IN THE ORGANIZATION
        WITH THE SIDE NUMBER {SIDENUM_NEW}."
        RESET SIDENUM_NEW
    ! get another side number
        FIND SIDENUM_NEW
        RESET SIDENUM_NOT_MISSING
    ! once again must verify that side number is not a null
    ! value
        FIND SIDENUM_NOT_MISSING
        GET SIDENUM_NEW = SIDE, AIRCRAFT, SIDE
    END
    SIDENUM_EXISTS = TRUE
    SIDENUM = (SIDE);
```

RULE REFERENTIAL_INTEGRITY_UPDATE_SIDENUM_EXISTS

```
IF
    FIELD_TO_UPDATE = SIDE_NUMBER AND
    SIDENUM_UPDATE <> UNKNOWN OR
    SIDENUM_UPDATE <> (BLANK)
THEN
    GET SIDENUM_UPDATE = SIDE, AIRCRAFT, SIDE
    ! loop till side number matches an aircraft in organization
    WHILETRUE SIDE = UNKNOWN THEN
        CLOSE AIRCRAFT
        DISPLAY " NO AIRCRAFT EXISTS IN THE ORGANIZATION
        WITH THE SIDE NUMBER {SIDENUM_UPDATE}."
        RESET SIDENUM_UPDATE
    ! get another side number
        FIND SIDENUM_UPDATE
        RESET SIDENUM_UPDATE_NOT_MISSING
    ! once again must verify that side number is not a null
    ! value
        FIND SIDENUM_UPDATE_NOT_MISSING
        GET SIDENUM_UPDATE = SIDE, AIRCRAFT, SIDE
    END
    SIDENUM_UPDATE_EXISTS = TRUE
    SIDENUM = (SIDE)
    CLOSE AIRCRAFT;
```

```

RULE ENGINE_HOURS_VALID
IF
    EXCD = X AND
    ENGHRS_VALID = UNKNOWN AND
    FIELD_TO_UPDATE <> ENGINE_HOURS
THEN
    ENGHRS_VALID = NOT_NEEDED
ELSE
    Y= 0
    ENGINE = (ENGINES - 1)
    WHILETRUE Y <= (ENGINE) THEN
        RESET ENGHRS_VALID
        ENGNUM = (Y +1)
        RESET ENGHRS
        FIND ENGHRS
        RESET ENGHRS_LOOP
        FIND ENGHRS_LOOP
        Y = (Y +1)
        APPEND FLTENG
        CLS
    END
    ENGHRS_VALID = TRUE;

RULE ENGINE_HOURS_LOOP
IF
    ENGHRS_LOOP = UNKNOWN
THEN
    WHILETRUE ENGHRS_VALID = UNKNOWN THEN
        RESET TEST_ENGHRS
        FIND TEST_ENGHRS
    END
    ENGHRS_LOOP = TRUE;

RULE UPDATE_ENGINE_HOURS_VALID_1
IF
    EXCD = X AND
    UPDATE_ENGHRS_VALID = UNKNOWN AND
    WHICHTASK = UPDATE_RECORD AND
    FIELD_TO_UPDATE <> ENGINE_HOURS
THEN
    UPDATE_ENGHRS_VALID = NOT_NEEDED;

RULE UPDATE_ENGINE_HOURS_VALID_2
IF
    EXCD <> X AND
    UPDATE_ENGHRS_VALID = UNKNOWN AND
    WHICHTASK = UPDATE_RECORD AND
    FIELD_TO_UPDATE <> ENGINE_HOURS
THEN
    Y = 0
    ENGINE = (ENGINES - 1)

```

```

WHILETRUE Y <= (ENGINE) THEN
    RESET ENGHRS_VALID
    ENGNUM = (Y + 1)
    RESET ENGHRS
    FIND ENGHRS
    RESET ENGHRS_LOOP
    FIND ENGHRS_LOOP
    Y = (Y +1)
    APPEND FLTENG
    CLS

```

```

END
UPDATE_ENGHRS_VALID = TRUE;

```

```

RULE UPDATE_ENGINE_HOURS_LOOP

```

```

IF

```

```

    UPDATE_ENGHRS_LOOP = UNKNOWN

```

```

THEN

```

```

    WHILETRUE UPDATE_ENGHRS_VALID = UNKNOWN THEN

```

```

        RESET TEST_ENGHRS

```

```

        FIND TEST_ENGHRS

```

```

    END

```

```

    UPDATE_ENGHRS_LOOP = TRUE;

```

!*** USER DEFINED CONSTRAINT RULES *******

```

RULE MISSION_POSITION_12A

```

```

IF

```

```

    MSN1_1 = 1 AND

```

```

    EXCD <> X AND

```

```

    MSN12_VALID = UNKNOWN

```

```

THEN

```

```

    WHILETRUE MSN12_VALID = UNKNOWN THEN

```

```

        RESET CK_MSN12A

```

```

        FIND CK_MSN12A

```

```

        RESET REPEAT_REQUEST2A

```

```

        FIND REPEAT_REQUEST2A

```

```

    END

```

```

    MSN12_VALID = TRUE;

```

```

RULE USER_DEFINED_MISSION12A_CODE

```

```

IF

```

```

    MSN1_2 = A OR

```

```

    MSN1_2 = B OR

```

```

    MSN1_2 = C OR

```

```

    MSN1_2 = D OR

```

```

    MSN1_2 = E OR

```

```

    MSN1_2 = F OR

```

```

    MSN1_2 = G OR

```

```

    MSN1_2 = H OR

```

```

    MSN1_2 = I OR

```

```

    MSN1_2 = N OR

```



```

      MSN1_2 = 0 OR
      MSN1_2 = P OR
      MSN1_2 = R AND
      MSN1_1 = 1 AND
      EXCD <> X
THEN
      CK_MSN12A = YES
      MSN12_VALID = TRUE;

RULE USER_DEFINED_MISSION12AA_CODE
IF
      MSN1_2 <> A OR
      MSN1_2 <> B OR
      MSN1_2 <> C OR
      MSN1_2 <> D OR
      MSN1_2 <> E OR
      MSN1_2 <> F OR
      MSN1_2 <> G OR
      MSN1_2 <> H OR
      MSN1_2 <> I OR
      MSN1_2 <> N OR
      MSN1_2 <> O OR
      MSN1_2 <> P OR
      MSN1_2 <> R AND
      MSN1_1 = 1 AND
      EXCD <> X
THEN
      CK_MSN12A = YES;

RULE REPEAT_REQUEST_12A
IF
      MSN12_VALID <> UNKNOWN
THEN
      REPEAT_REQUEST2A = NO
ELSE
      CK_MSN12A = YES
      REPEAT_REQUEST2A = YES
      CLS
      DISPLAY " POSITION 2 MUST BE R, A-I, OR N-P.
              PRESS ENTER TO CONTINUE. ~"
      CLS
      RESET MSN1_2
      FIND MSN1_2;

RULE MISSION_POSITION_12B
IF
      MSN1_1 = 2 AND
      EXCD <> X AND
      MSN12_VALID = UNKNOWN
THEN
      WHILETRUE MSN12_VALID = UNKNOWN THEN

```



```

        RESET CK_MSN12B
        FIND CK_MSN12B
        RESET REPEAT_REQUEST2B
        FIND REPEAT_REQUEST2B
    END
    MSN12_VALID = TRUE;

```

RULE USER_DEFINED_MISSION12B_CODE

```

IF
    MSN1_2 = J OR
    MSN1_2 = K OR
    MSN1_2 = L OR
    MSN1_2 = M OR
    MSN1_2 = N OR
    MSN1_2 = O OR
    MSN1_2 = P OR
    MSN1_2 = Q OR
    MSN1_2 = R AND
    MSN1_1 = 2 AND
    EXCD <> X
THEN
    CK_MSN12B = YES
    MSN12_VALID = TRUE;

```

RULE USER_DEFINED_MISSION12BB_CODE

```

IF
    MSN1_2 <> J OR
    MSN1_2 <> K OR
    MSN1_2 <> L OR
    MSN1_2 <> M OR
    MSN1_2 <> N OR
    MSN1_2 <> O OR
    MSN1_2 <> P OR
    MSN1_2 <> Q OR
    MSN1_2 <> R AND
    MSN1_1 = 2 AND
    EXCD <> X
THEN
    CK_MSN12B = YES;

```

RULE REPEAT_REQUEST_12B

```

IF
    MSN12_VALID <> UNKNOWN
THEN
    REPEAT_REQUEST2B = NO
ELSE
    REPEAT_REQUEST2B = YES
    CLS
    DISPLAY " POSITION 2 MUST BE IN THE RANGE OF J-R.
            PRESS ENTER TO CONTINUE. ~"
    CLS

```

```

        RESET MSN1_2
        FIND MSN1_2;

RULE MISSION_POSITION_12C
IF
    MSN1_1 >= 3 AND
    EXCD <> X AND
    MSN12_VALID = UNKNOWN
THEN
    WHILETRUE MSN12_VALID = UNKNOWN THEN
        RESET CK_MSN12C
        FIND CK_MSN12C
        RESET REPEAT_REQUEST2C
        FIND REPEAT_REQUEST2C
    END
    MSN12_VALID = TRUE;

RULE USER_DEFINED_MISSION12C_CODE
IF
    MSN1_2 = N OR
    MSN1_2 = O OR
    MSN1_2 = S OR
    MSN1_2 = T OR
    MSN1_2 = U OR
    MSN1_2 = V OR
    MSN1_2 = W OR
    MSN1_2 = X OR
    MSN1_2 = Y OR
    MSN1_2 = Z AND
    MSN1_1 >= 3 AND
    EXCD <> X
THEN
    CK_MSN12C = YES
    MSN12_VALID = TRUE;

RULE USER_DEFINED_MISSION12CC_CODE
IF
    MSN1_2 <> N OR
    MSN1_2 <> O OR
    MSN1_2 <> S OR
    MSN1_2 <> T OR
    MSN1_2 <> U OR
    MSN1_2 <> V OR
    MSN1_2 <> W OR
    MSN1_2 <> X OR
    MSN1_2 <> Y OR
    MSN1_2 <> Z AND
    MSN1_1 >= 3 AND
    EXCD <> X
THEN
    CK_MSN12C = YES;

```

```

RULE REPEAT_REQUEST_12C
IF
    MSN12_VALID <> UNKNOWN
THEN
    REPEAT_REQUEST2C = NO
ELSE
    REPEAT_REQUEST2C = YES
    CLS
    DISPLAY " POSITION 2 MUST BE N, O, OR S-Z.
            PRESS ENTER TO CONTINUE. ~"
    CLS
    RESET MSN1_2
    FIND MSN1_2;

```

```

RULE MISSION_POSITION_12D
IF
    EXCD = X AND
    MSN12_VALID = UNKNOWN
THEN
    WHILETRUE MSN12_VALID = UNKNOWN THEN
        RESET CK_MSN12D
        FIND CK_MSN12D
        RESET REPEAT_REQUEST2D
        FIND REPEAT_REQUEST2D
    END
    MSN12_VALID = TRUE;

```

RULE USER_DEFINED_MISSION12D_CODE

```

IF
    MSN1_2 = N OR
    MSN1_2 = O AND
    EXCD = X
THEN
    CK_MSN12D = YES
    MSN12_VALID = TRUE;

```

RULE TEST_MISSION12DD_CODE_VALID

```

IF
    MSN1_2 <> N AND
    EXCD = X
THEN
    CK_MSN12D = YES;

```

RULE TEST_MISSION12DDD_CODE_VALID

```

IF
    MSN1_2 <> O AND
    EXCD = X
THEN
    CK_MSN12D = YES;

```

```

RULE REPEAT_REQUEST_12D

```

```

IF
    MSN12_VALID <> UNKNOWN
THEN
    REPEAT_REQUEST2D = NO
ELSE
    REPEAT_REQUEST2D = YES
    CLS
    DISPLAY " POSITION 2 MUST BE N, OR O.
            PRESS ENTER TO CONTINUE. ~"
    CLS
    RESET MSN1_2
    FIND MSN1_2;

```

RULE MISSION_POSITION_22A

```

IF
    MSN2_1 = 1 AND
    MSN22_VALID = UNKNOWN
THEN
    WHILETRUE MSN22_VALID = UNKNOWN THEN
        RESET CK_MSN22A
        FIND CK_MSN22A
        RESET REPEAT_REQUEST2A
        FIND REPEAT_REQUEST2A
    END
    MSN22_VALID = TRUE;

```

RULE USER_DEFINED_MISSION22A_CODE

```

IF
    MSN2_2 = A OR
    MSN2_2 = B OR
    MSN2_2 = C OR
    MSN2_2 = D OR
    MSN2_2 = E OR
    MSN2_2 = F OR
    MSN2_2 = G OR
    MSN2_2 = H OR
    MSN2_2 = I OR
    MSN2_2 = N OR
    MSN2_2 = O OR
    MSN2_2 = P OR
    MSN2_2 = R AND
    MSN2_1 = 1 AND
    EXCD <> X

```

```

THEN
    CK_MSN22A = YES
    MSN22_VALID = TRUE;

```

RULE USER_DEFINED_MISSION22AA_CODE

```

IF
    MSN2_2 <> A OR
    MSN2_2 <> B OR

```

```

MSN2_2 <> C OR
MSN2_2 <> D OR
MSN2_2 <> E OR
MSN2_2 <> F OR
MSN2_2 <> G OR
MSN2_2 <> H OR
MSN2_2 <> I OR
MSN2_2 <> N OR
MSN2_2 <> O OR
MSN2_2 <> P OR
MSN2_2 <> Q AND
MSN2_1 = 1 AND
EXCD <> X
THEN
    CK_MSN22A = YES;

RULE REPEAT_REQUEST_2A
IF
    MSN22_VALID <> UNKNOWN
THEN
    REPEAT_REQUEST22A = NO
ELSE
    CK_MSN22A = YES
    REPEAT_REQUEST22A = YES
    CLS
    DISPLAY " POSITION 2 MUST BE R, A-I, OR N-P.
            PRESS ENTER TO CONTINUE. ~"
    CLS
    RESET MSN2_2
    FIND MSN2_2;

RULE MISSION_POSITION_22B
IF
    MSN2_1 = 2 AND
    EXCD <> X AND
    MSN22_VALID = UNKNOWN
THEN
    WHILETRUE MSN22_VALID = UNKNOWN THEN
        RESET CK_MSN22B
        FIND CK_MSN22B
        RESET REPEAT_REQUEST22B
        FIND REPEAT_REQUEST22B
    END
    MSN22_VALID = TRUE;

RULE USER_DEFINED_MISSION22B_CODE
IF
    MSN2_2 = J OR
    MSN2_2 = K OR
    MSN2_2 = L OR
    MSN2_2 = M OR

```

```

MSN2_2 = N OR
MSN2_2 = O OR
MSN2_2 = P OR
MSN2_2 = Q OR
MSN2_2 = R AND
MSN2_1 = 2 AND
EXCD <> X
THEN
    CK_MSN22B = YES
    MSN22_VALID = TRUE;

RULE USER_DEFINED_MISSION22BB_CODE
IF
    MSN2_2 <> J OR
    MSN2_2 <> K OR
    MSN2_2 <> L OR
    MSN2_2 <> M OR
    MSN2_2 <> N OR
    MSN2_2 <> O OR
    MSN2_2 <> P OR
    MSN2_2 <> Q OR
    MSN2_2 <> R AND
    MSN2_1 = 2 AND
    EXCD <> X
THEN
    CK_MSN22B = YES;

    RULE REPEAT_REQUEST_22B
    IF
        MSN22_VALID <> UNKNOWN
    THEN
        REPEAT_REQUEST22B = NO
    ELSE
        REPEAT_REQUEST22B = YES
        CLS
        DISPLAY " POSITION 2 MUST BE IN THE RANGE OF J-R.
                PRESS ENTER TO CONTINUE. ~"
        CLS
        RESET MSN2_2
        FIND MSN2_2;

    RULE MISSION_POSITION_22C
    IF
        MSN2_1 >= 3 AND
        EXCD <> X AND
        MSN22_VALID = UNKNOWN
    THEN
        WHILE TRUE MSN22_VALID = UNKNOWN THEN
            RESET CK_MSN22C
            FIND CK_MSN22C
            RESET REPEAT_REQUEST22C

```



```
        FIND REPEAT_REQUEST22C
    END
    MSN22_VALID = TRUE;
```

RULE USER_DEFINED_MISSION22C_CODE

IF

```
    MSN2_2 = N OR
    MSN2_2 = O OR
    MSN2_2 = S OR
    MSN2_2 = T OR
    MSN2_2 = U OR
    MSN2_2 = V OR
    MSN2_2 = W OR
    MSN2_2 = X OR
    MSN2_2 = Y OR
    MSN2_2 = Z AND
    MSN2_1 >= 3 AND
    EXCD <> X
```

THEN

```
    CK_MSN22C = YES
    MSN22_VALID = TRUE;
```

RULE USER_DEFINED_MISSION22CC_CODE

IF

```
    MSN2_2 <> N OR
    MSN2_2 <> O OR
    MSN2_2 <> S OR
    MSN2_2 <> T OR
    MSN2_2 <> U OR
    MSN2_2 <> V OR
    MSN2_2 <> W OR
    MSN2_2 <> X OR
    MSN2_2 <> Y OR
    MSN2_2 <> Z AND
    MSN2_1 >= 3 AND
    EXCD <> X
```

THEN

```
    CK_MSN22C = YES;
```

RULE REPEAT_REQUEST_22C

IF

```
    MSN22_VALID <> UNKNOWN
```

THEN

```
    REPEAT_REQUEST22C = NO
```

ELSE

```
    REPEAT_REQUEST22C = YES
```

```
    CLS
```

```
    DISPLAY " POSITION 2 MUST BE N, O, OR S-Z.
            PRESS ENTER TO CONTINUE. ~"
```

```
    CLS
```

```
    RESET MSN2_2
```

FIND MSN2_2;

RULE MISSION_POSITION_32A

IF

MSN3_1 = 1 AND

MSN32_VALID = UNKNOWN

THEN

WHILETRUE MSN32_VALID = UNKNOWN THEN

RESET CK_MSN32A

FIND CK_MSN32A

RESET REPEAT_REQUEST32A

FIND REPEAT_REQUEST32A

END

MSN32_VALID = TRUE;

RULE USER_DEFINED_MISSION32A_CODE

IF

MSN3_2 = A OR

MSN3_2 = B OR

MSN3_2 = C OR

MSN3_2 = D OR

MSN3_2 = E OR

MSN3_2 = F OR

MSN3_2 = G OR

MSN3_2 = H OR

MSN3_2 = I OR

MSN3_2 = N OR

MSN3_2 = O OR

MSN3_2 = P OR

MSN3_2 = R AND

MSN3_1 = 1 AND

EXCD <> X

THEN

CK_MSN32A = YES

MSN32_VALID = TRUE;

RULE USER_DEFINED_MISSION32AA_CODE

IF

MSN3_2 <> A OR

MSN3_2 <> B OR

MSN3_2 <> C OR

MSN3_2 <> D OR

MSN3_2 <> E OR

MSN3_2 <> F OR

MSN3_2 <> G OR

MSN3_2 <> H OR

MSN3_2 <> I OR

MSN3_2 <> N OR

MSN3_2 <> O OR

MSN3_2 <> P OR

MSN3_2 <> R AND

```

        MSN3_1 = 1 AND
        EXCD <> X
THEN
    CK_MSN32A = YES;

RULE REPEAT_REQUEST_3A
IF
    MSN32_VALID <> UNKNOWN
THEN
    REPEAT_REQUEST32A = NO
ELSE
    CK_MSN32A = YES
    REPEAT_REQUEST32A = YES
    CLS
    DISPLAY " POSITION 2 MUST BE R, A-I, OR N-P.
            PRESS ENTER TO CONTINUE. ~"
    CLS
    RESET MSN3_2
    FIND MSN3_2;

RULE MISSION_POSITION_3
IF
    MSN3_1 = 2 AND
    EXCD <> X AND
    MSN32_VALID = UNKNOWN
THEN
    WHILETRUE MSN32_VALID = UNKNOWN THEN
        RESET CK_MSN32B
        FIND CK_MSN32B
        RESET REPEAT_REQUEST32B
        FIND REPEAT_REQUEST32B
    END
    MSN32_VALID = TRUE;

RULE USER_DEFINED_MISSION32B_CODE
IF
    MSN3_2 = J OR
    MSN3_2 = K OR
    MSN3_2 = L OR
    MSN3_2 = M OR
    MSN3_2 = N OR
    MSN3_2 = O OR
    MSN3_2 = P OR
    MSN3_2 = Q OR
    MSN3_2 = R AND
    MSN3_1 = 2 AND
    EXCD <> X
THEN
    CK_MSN32B = YES
    MSN32_VALID = TRUE;

```

RULE USER_DEFINED_MISSION32BB_CODE

IF

MSN3_2 <> J OR
MSN3_2 <> K OR
MSN3_2 <> L OR
MSN3_2 <> M OR
MSN3_2 <> N OR
MSN3_2 <> O OR
MSN3_2 <> P OR
MSN3_2 <> Q OR
MSN3_2 <> R AND
MSN3_1 = 2 AND
EXCD <> X

THEN

CK_MSN32B = YES;

RULE REPEAT_REQUEST_32B

IF

MSN32_VALID <> UNKNOWN

THEN

REPEAT_REQUEST32B = NO

ELSE

REPEAT_REQUEST32B = YES

CLS

DISPLAY " POSITION 2 MUST BE IN THE RANGE OF J-R.
PRESS ENTER TO CONTINUE. ~"

CLS

RESET MSN3_2

FIND MSN3_2;

RULE MISSION_POSITION_32C

IF

MSN3_1 >= 3 AND
EXCD <> X AND
MSN32_VALID = UNKNOWN

THEN

WHILETRUE MSN32_VALID = UNKNOWN THEN

RESET CK_MSN32C

FIND CK_MSN32C

RESET REPEAT_REQUEST32C

FIND REPEAT_REQUEST32C

END

MSN32_VALID = TRUE;

RULE USER_DEFINED_MISSION32C_CODE

IF

MSN3_2 = N OR
MSN3_2 = O OR
MSN3_2 = S OR
MSN3_2 = T OR
MSN3_2 = U OR

```

MSN3_2 = V OR
MSN3_2 = W OR
MSN3_2 = X OR
MSN3_2 = Y OR
MSN3_2 = Z AND
MSN3_1 >= 3 AND
EXCD <> X
THEN
  CK_MSN32C = YES
  MSN32_VALID = TRUE;

```

RULE USER_DEFINED_MISSION32CC_CODE

```

IF
  MSN3_2 <> N OR
  MSN3_2 <> O OR
  MSN3_2 <> S OR
  MSN3_2 <> T OR
  MSN3_2 <> U OR
  MSN3_2 <> V OR
  MSN3_2 <> W OR
  MSN3_2 <> X OR
  MSN3_2 <> Y OR
  MSN3_2 <> Z AND
  MSN3_1 >= 3 AND
  EXCD <> X
THEN
  CK_MSN32C = YES;

```

```

  RULE REPEAT_REQUEST_32C
  IF
    MSN32_VALID <> UNKNOWN
  THEN
    REPEAT_REQUEST32C = NO
  ELSE
    REPEAT_REQUEST32C = YES
    CLS
    DISPLAY " POSITION 2 MUST BE N, O, OR S-Z.
              PRESS ENTER TO CONTINUE. ~"
    CLS
    RESET MSN3_2
    FIND MSN3_2;

```

```

ASK WHICHTASK: "CHOOSE A TASK TO PERFORM ON THE DATABASE.";
CHOICES WHICHTASK: APPEND_RECORD, UPDATE_RECORD,
DELETE_RECORD, DISPLAY_RECORD, EXIT;
ASK DOCNUM_NEW: " ENTER THE NEW DOCUMENT NUMBER.";
ASK SIDENUM_NEW: " PLEASE INDICATE THE SIDE NUMBER OF THE
AIRCRAFT.";
ASK SIDENUM_UPDATE: " PLEASE INDICATE THE NEW SIDE NUMBER.";

```

```

ASK EXCD: " ENTER AN EXCEPTION CODE OR <SPACE> FOR NONE.";
ASK MSN1_1: " ENTER A MISSION 1 CODE, HIT ENTER AFTER EACH
POSITION_ENTRY.";
ASK MSN1_2: " ENTER A MISSION 1 CODE, HIT ENTER AFTER EACH
POSITION_ENTRY           {MSN1_1}    ENTER SECOND
POSITION";
ASK MSN1_3: " ENTER A MISSION 1 CODE, HIT ENTER AFTER EACH
POSITION_ENTRY           {MSN1_1}{MSN1_2}    ENTER THIRD
POSITION";
ASK HRS1: " ENTER THE HOURS FLOWN ON MISSION 1.";
ASK MSN2_1: " ENTER A MISSION 2 CODE, HIT ENTER AFTER EACH
POSITION_ENTRY";
ASK MSN2_2: " ENTER A MISSION 2 CODE, HIT ENTER AFTER EACH
POSITION_ENTRY           {MSN2_1}    ENTER SECOND
POSITION";
ASK MSN2_3: " ENTER A MISSION 2 CODE, HIT ENTER AFTER EACH
POSITION_ENTRY           {MSN2_1}{MSN2_2}    ENTER THIRD
POSITION";
ASK HRS2: " ENTER THE HOURS FLOWN ON MISSION 2.";
ASK MSN3_1: " ENTER A MISSION 3 CODE, HIT ENTER AFTER EACH
POSITION_ENTRY           {MSN3_1}{MSN3_2}{MSN3_3}";
ASK MSN3_2: " ENTER A MISSION 3 CODE, HIT ENTER AFTER EACH
POSITION_ENTRY           {MSN3_1}    ENTER SECOND
POSITION";
ASK MSN3_3: " ENTER A MISSION 3 CODE, HIT ENTER AFTER EACH
POSITION_ENTRY           {MSN3_1}{MSN3_2}    ENTER THIRD
POSITION";
ASK HRS3: " ENTER THE HOURS FLOWN ON MISSION 3.";
ASK TOTFLT: " ENTER THE TOTAL NUMBER OF FLIGHTS.";
ASK OPS: " ENTER THE SHIP/FIELD OPERATIONS CODE.";
ASK CJ: " ENTER THE NUMBER OF CATAPULT SHOTS OR JATO
LAUNCHES.";
ASK NUMHOISTS: " ENTER THE NUMBER OF AIRCRAFT HOISTS.";
ASK ENGHRS: " ENTER HOURS FOR ENGINE {ENGNUM}.";
ASK UPDATE_ENGHRS: " ENTER HOURS FOR ENGINE
{ENGINE_NUMBER}.";
ASK DOCNUM_VIEW: " WHICH NAVAL AIRCRAFT FLIGHT RECORD DO YOU
WANT TO VIEW.";
ASK DOCNUM_DELETE: " WHICH NAVAL AIRCRAFT FLIGHT RECORD DO
YOU WANT TO DELETE.";
ASK DOCNUM_UPDATE: " WHICH NAVAL AIRCRAFT FLIGHT RECORD DO
YOU WANT TO UPDATE.";
ASK FIELD_TO_UPDATE: " SELECT WHICH FIELD YOU WANT TO
UPDATE.";
CHOICES FIELD_TO_UPDATE: DOCUMENT_NUMBER, SIDE_NUMBER,
EXCEPTION_CODE, MISSION_CODE_1, MISSION_1_HOURS,
MISSION_CODE_2, MISSION_2_HOURS, MISSION_CODE_3,
MISSION_3_HOURS, TOTAL_FLIGHTS, SHIP_FIELD_OPERATIONS_CODE,
CATAPULT_JATO_LAUNCHES, AIRLIFT_MISSION_NUMBER,
NUMBER_OF_HOISTS, ENGINE_HOURS, DONE;
ASK EXCD_NEW: " ENTER AN EXCEPTION CODE OR <SPACE> FOR

```


NONE.";
ASK ENGINE_NUMBER: " CHOOSE THE ENGINE NUMBER THAT YOU WANT
TO CHANGE THE HOURS FLOWN.";
ASK CONTINUE: " THIS ACTION WILL DELETE THE WHOLE FLIGHT
RECORD! DO YOU WANT TO CONTINUE?";
CHOICES CONTINUE: YES, NO;

LIST OF REFERENCES

1. Fernandez,E.B., Summers, R.C.,and Wood,C., *Database Security and Integrity*, Addison-Wesly Publishing Company Inc., 1981.
2. Codd,E.F., *The Relational Model for Database Management*, Version 2, Addison-Wesly Publishing Company Inc., 1990.
3. Department of the Navy, Office of the Chief of Naval Operations, OPNAVINST 3710.7N, *Natops General Flight and Operating Instructions*, 10 April 1990.
4. Kroenke,D.M., and Dolan,K.A., *Database Processing*, 3rd ed., Science Research Associates Inc., Chicago, Illinois, 1988.
5. Shafer,S.L., and Westney,R.E., "Six Steps To Successful Expert Systems,"*Cost Engineering*, v.30, p.17, June 1988.
6. Department of the Navy. Office of the Chief of Naval Operations, OPNAVINST 4790.2E, *The Naval Aviation Maintenance Program*, 1 January 1989.

BIBLIOGRAPHY

- Guida, G., and Tasso, C., *Topics in Expert System Design*, Elsevier Science Publishers B.V., North Holland, 1989.
- Kerschberg, L., *Expert System Databases*, The Benjamin/Cummings Publishing Company, Menlo Park, California, 1987.
- Rolston, D.W., *Principles of Artificial Intelligence and Expert Systems Development*, McGraw-Hill Inc., 1988.
- Moose, A., Schussler, T., and Shafer, D., *VP-Expert*, Paperback Software International, Berkeley, California, 1989.
- Whitten, J.L., Bentley, L.D., and Ho, T.L., *Systems Analysis and Design Methods*, Times Mirror/Mosby College Publishing, St. Louis, Missouri, 1986.

INITIAL DISTRIBUTION LIST

	NO. COPIES
1. Defense Technical Information Center Cameron Station Alexandria, Virginia 22304-6145	2
2. Dudley Knox Library, Code 52 Naval Postgraduate School Monterey, California 93943-5002	2
3. Prof. Magdi N. Kamel, Code AS/KA Department of Administrative Sciences Naval Postgraduate School Monterey, California 93943-5000	2
4. Prof. Hemant K. Bhargava, Code AS/BH Department of Administrative Sciences Naval Postgraduate School Monterey, California 93943-5000	1
5. Commanding Officer Naval Sea Logistics Center Code 612.2 5450 Carlisle Pike P.O. Box 2060 Mechanicsburg, Pennsylvania 17055-0795	1
6. LT. George J. Salitsky, USN 117 School St. Childs, Pennsylvania 18407	2

844213

Thesis

S1538 Salitsky

c.1 A prototype semantic integrity front end expert system for a relational database.

Thesis

S1538 Salitsky

c.1 A prototype semantic integrity front end expert system for a relational database.



DUDLEY KNOX LIBRARY



3 2768 00018468 3